

T.Y.B.Sc. I.T.
SEMESTER V
ASP.NET with C#

LAB Manual

PRACTICAL NO. : 01(A)

AIM: Write a console application that obtains four int values from the user and displays the product.

Hint: you may recall that the Convert.ToDouble() command was used to convert the input from the console to a double; the equivalent command to convert from a string to an int is Convert.ToInt32().

CODE:

```
using System;
namespace ConsoleApplication1
{
    class Program
    {
        static void Main(string[] args)
        {
            int num1, num2,num3,num4,prod;
            Console.Write("Enter number 1: ");
            num1 = Int32.Parse(Console.ReadLine());
            Console.Write("Enter number 2: ");
            num2 = Convert.ToInt32(Console.ReadLine());
            Console.Write("Enter number 3: ");
            num3 = Convert.ToInt32(Console.ReadLine());
            Console.Write("Enter number 4: ");
            num4 = Convert.ToInt32(Console.ReadLine());
            prod = num1 * num2 * num3 * num4;
            Console.WriteLine(num1 + "*" + num2 + "*" + num3 + "*" + num4 + "=" + prod);
        }
    }
}
```

OUTPUT:

```
Enter number 1: 6
Enter number 2: 5
Enter number 3: 4
Enter number 4: 3
6*5*4*3=360
```

PRACTICAL NO. : 01(B)

AIM: If you have two integers stored in variables var1 and var2, what Boolean test can you perform to see if one or the other (but not both) is greater than 10?

CODE:

```
using System;
namespace ConsoleApplication2
{
    class Program
    {
        static void Main(string[] args)
        {
            int var1, var2;
            Console.Write("Enter number 1: ");
            var1 = Int32.Parse(Console.ReadLine());
            Console.Write("Enter number 2: ");
            var2 = Convert.ToInt32(Console.ReadLine());
            if ((var1 > 10 && var2 <= 10) || (var2 > 10 && var1 <= 10))
            {
                Console.WriteLine("Boolean test succeeded \n Both number are not >10");
            }
        }
    }
}
```

OUTPUT:

```
Enter number 1: 5
Enter number 2: 11
Boolean test succeeded
Both number are not >10
```

PRACTICAL NO. : 01(C)

AIM: Write an application that includes the logic from Exercise 1, obtains two numbers from the user, and displays them, but rejects any input where both numbers are greater than 10 and asks for two new numbers.

CODE:

```
using System;
namespace ConsoleApplication2
{
    class Program
    {
        static void Main(string[] args)
        {
            int var1, var2;
            label1:
            Console.Write("Enter number 1: ");
            var1 = Int32.Parse(Console.ReadLine());
            Console.Write("Enter number 2: ");
            var2 = Convert.ToInt32(Console.ReadLine());
            if ((var1 > 10 && var2 > 10) )
            {
                Console.WriteLine("Both No are greater than 10 are not allowed");
                goto label1;
            }
            else
            {
                Console.WriteLine("Number 1: "+var1);
                Console.WriteLine("Number 2 :"+var2);
            }
        }
    }
}
```

OUTPUT:

```
Enter number 1:15
Enter number 2: 16
Both no. are greater than 10 are not allowed
Enter number 1:5
Enter number 2: 15
Number 1: 5
Number 2 :15
```

PRACTICAL NO. : 01(D)

AIM: Write a console application that places double quotation marks around each word in a string .

CODE:

```
using System;
namespace ConsoleApplication3
{
    class Program
    {
        static void Main(string[] args)
        {
            string str1;
            Console.WriteLine("Enter string 1: ");
            str1 = Console.ReadLine();
            string[] words = str1.Split(' ');
            for (int i = 0; i < words.Length; i++)
            {
                Console.WriteLine("\" " + words[i] + "\" ");
            }
        }
    }
}
```

OUTPUT:

Enter string 1: we can and we will
"we" "can" "and" "we" "will"

PRACTICAL NO. : 01(E)

AIM: Write an application that uses two command-line arguments to place values into a string and an integer variable, respectively. Then display these values.

CODE:

```
using System;
namespace cmdLineArgs
{
    class Program
    {
        static void Main(string[] args)
        {
            string str = args[0];
            int n = Convert.ToInt32(args[1]);
            Console.WriteLine("String:" + str);
            Console.WriteLine("Number:" + n);
        }
    }
}
```

OUTPUT:

String : Roman
Number : 10

PRACTICAL NO. : 01(F)

AIM: Write an application that receives the following information from a set of students:

Student Id:

Student Name:

Course Name:

Date of Birth:

The application should also display the information of all the students once the data is Entered. Implement this using an Array of Structures.

CODE:

```
using System;
namespace ArrayOfStructs
{
    class Program
    {
        struct Student
        {
            public string studid, name, cname;
            public int day, month, year;
        }
        static void Main(string[] args)
        {
            Student[] s = new Student[5];
            int i;
            for (i = 0; i < 5; i++)
            {
                Console.WriteLine("Enter Student Id:");
                s[i].studid = Console.ReadLine();
                Console.WriteLine("Enter Student name : ");
                s[i].name = Console.ReadLine();
                Console.WriteLine("Enter Course name : ");
                s[i].cname = Console.ReadLine();
                Console.WriteLine("Enter date of birth\n Enter day(1-31):");
                s[i].day = Convert.ToInt32(Console.ReadLine());
                Console.WriteLine("Enter month(1-12):");
                s[i].month = Convert.ToInt32(Console.ReadLine());
                Console.WriteLine("Enter year:");
                s[i].year = Convert.ToInt32(Console.ReadLine());
            }
            Console.WriteLine("\n\nStudent's List\n");
            for (i = 0; i < 5; i++)
            {
                Console.WriteLine("\nStudent ID : " + s[i].studid);
                Console.WriteLine("\nStudent name : " + s[i].name);
                Console.WriteLine("\nCourse name : " + s[i].cname);
                Console.WriteLine("\nDate of birth(dd-mm-yy) : " + s[i].day + "-" + s[i].month +
                "-" + s[i].year);
            } } } }
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

OUTPUT:

Enter Student Id:0001
Enter Student name : Prachit
Enter Course name : MSCit
Enter date of birth
Enter day(1-31):29
Enter month(1-12):9
Enter year:1995
Enter Student Id:0002
Enter Student name : Aniket
Enter Course name : Bscit
Enter date of birth
Enter day(1-31):4
Enter month(1-12):3
Enter year:1996
Enter Student Id:0003
Enter Student name : Prathamesh
Enter Course name : BMS
Enter date of birth
Enter day(1-31):9
Enter month(1-12):8
Enter year:2000
Enter Student Id:0004
Enter Student name : Sumit
Enter Course name : MScet
Enter date of birth
Enter day(1-31):25
Enter month(1-12):5
Enter year:1994
Enter Student Id : 0005
Enter Student name : Zaid
Enter Course name : BCOM
Enter date of birth
Enter day(1-31):6
Enter month(1-12):7
Enter year:1993

Student's List

Student ID : 0001
Student name : Prachit
Course name : MSCit
Date of birth(dd-mm-yy) : 29-9-1995
Student ID : 0002
Student name : Aniket
Course name : Bscit
Date of birth(dd-mm-yy) : 4-3-1996
Student ID : 0003
Student name : Prathamesh
Course name : BMS
Date of birth(dd-mm-yy) : 9-8-2000

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

Student ID : 0004

Student name : Sumit

Course name : MScet

Date of birth(dd-mm-yy) : 25-5-1994

Student ID : 0005

Student name : Zaid

Course name : BCOM

Date of birth(dd-mm-yy) : 6-7-1993

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:

I) Generate Fibonacci series.

CODE:

```
using System;
namespace ConsoleApplication3
{
    class Program
    {
        static void Main(string[] args)
        {
            int num1=0,num2=1,num3,num4,num,counter;
            Console.Write ("Upto how many number you want fibonacci series:");
            num=int.Parse(Console.ReadLine());
            counter=3;
            Console.Write(num1+"\t"+num2);
            while(counter<=num)
            {
                num3 = num1 + num2;
                if (counter >= num)
                    break;
                Console.Write("\t" + num3);
                num1 = num2;
                num2 = num3;
                counter++;
            }
        }
    }
}
```

OUTPUT:

Upto how many number you want fibonacci series:5
0 1 1 2 3

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:

II) Generate various patterns (triangles, diamond and other patterns) with numbers.

CODE -1:

```
using System;
namespace ConsoleApplication1
{
    class Program
    {
        static void Main(string[] args)
        {
            int row, col;
            for (row = 1; row <= 5; row++)
            {
                for (col = 1; col <= row; col++)
                    Console.WriteLine(col);
            }
        }
    }
}
```

OUTPUT:

```
1
12
123
1234
12345
```

ASP.NET WITH C#
TYBSC-IT (SEM V)

CODE -2:

```
using System;
namespace ConsoleApplication1
{
    class Program
    {
        static void Main(string[] args)
        {
            int row, sp, col;
            for (row = 1; row <= 5; row++)
            {
                for (sp = 1; sp <= 5 - row; sp++)
                {
                    Console.Write(' ');
                }
                for (col = 1; col <= row; col++)
                {
                    Console.Write(col);
                }
                Console.WriteLine();
            }
        }
    }
}
```

OUTPUT:

```
1
12
123
1234
12345
```

CODE -3:

```
using System;
namespace ConsoleApplication1
{
    class Program
    {
        static void Main(string[] args)
        {
            int row, sp, col, revcol;
            for (row = 1; row <= 5; row++)
            {
                for (sp = 1; sp <= 5 - row; sp++)
                {
                    Console.Write(' ');
                }
                for (col = 1; col <= row; col++)
                {
                    Console.Write(col);
                }
                for (revcol = col - 2; revcol >= 1; revcol--)
                {
                    Console.Write(revcol);
                }
                Console.WriteLine();
            }
        }
    }
}
```

OUTPUT:

```
1
121
12321
1234321
123454321
```

CODE-4:

```
using System;
namespace ConsoleApplication1
{
    class Program
    {
        static void Main(string[] args)
        {
            int row, sp, col, revcol;
            for (row = 1; row <= 5; row++) {
                for (sp = 1; sp <= 5 - row; sp++)
                {
                    Console.Write(' ');
                }
                for (col = 1; col <= row; col++)
                {
                    Console.Write(col);
                }
                for (revcol = col - 2; revcol >= 1; revcol--)
                { Console.Write(revcol); }
                Console.WriteLine();
            }
            for (row = 4; row >= 1; row--) {
                for (sp = 1; sp <= 5 - row; sp++)
                {
                    Console.Write(' ');
                }
                for (col = 1; col <= row; col++)
                {
                    Console.Write(col);
                }
                for (revcol = col - 2; revcol >= 1; revcol--)
                { Console.Write(revcol); }
                Console.WriteLine();
            }
        }
    }
}
```

OUTPUT:

```
1
 121
 12321
1234321
123454321
 1234321
  12321
   121
    1
```

CODE-5:

```
using System;
namespace pattern
{
    class Program
    {
        static void Main(string[] args)
        {
            int row, col,sp,reverse;
            for (row = 1; row <= 5; row++)
            {
                for (sp = 1; sp <= 5 - row; sp++)
                    Console.Write(" ");
                for (col = 1; col <= row; col++)
                    if (col == 1)
                        Console.Write("*");
                    else
                        Console.Write(" ");
                for (reverse = col - 2; reverse >= 1; reverse--)
                    if (reverse == 1)
                        Console.Write("*");
                    else
                        Console.Write(" ");
                Console.WriteLine();
            }
            for (row = 4; row >=1; row--)
            {
                for (sp = 1; sp <= 5 - row; sp++)
                    Console.Write(" ");
                for (col = 1; col <= row; col++)
                    if (col == 1)
                        Console.Write("*");
                    else
                        Console.Write(" ");
                for (reverse = col - 2; reverse >= 1; reverse--)
                    if (reverse == 1)
                        Console.Write("*");
                    else
                        Console.Write(" ");
                Console.WriteLine();
            }
        }
    }
}
```

OUTPUT:

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

*
* *
* *
* *
* *
* *
* *
* *
* *
* *
*

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:

III) Test for prime numbers.

CODE:

```
using System;
namespace testprime
{
    class Program
    {
        static void Main(string[] args)
        {
            int num, counter;
            Console.Write("Enter number:");
            num = int.Parse(Console.ReadLine());
            for (counter = 2; counter <= num / 2; counter++)
            {
                if ((num % counter) == 0)
                    break;
            }
            if (num == 1)
                Console.WriteLine(num + "is neither prime nor composite");
            else if(counter<(num/2))
                Console.WriteLine(num+"is not prime number");
            else
                Console.WriteLine(num+"is prime number");
        }
    }
}
```

OUTPUT:

(1st attempt)

Enter number:3

3 is prime number

(2nd)

Enter number:1

1 is neither prime nor composite

(3rd)

Enter number:4

4 is not prime number

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:

IV) Generate prime numbers.

CODE:

```
using System;
namespace testprime
{
    class Program
    {
        static void Main(string[] args)
        {
            int counter, lowerlimit, upperlimit, limitCounter;
            Console.WriteLine("Enter lowerlimit:");
            lowerlimit = int.Parse(Console.ReadLine());
            Console.WriteLine("Enter upperlimit:");
            upperlimit = int.Parse(Console.ReadLine());
            Console.WriteLine("Prime number between " + lowerlimit + "and " + upperlimit + "
are ");
            for (limitCounter = lowerlimit; limitCounter <= upperlimit; limitCounter++)
            {
                for (counter = 2; counter <= limitCounter / 2; counter++)
                {
                    if ((limitCounter % counter) == 0)
                        break;
                }
                if (limitCounter == 1)
                    Console.WriteLine(limitCounter + "is neither prime nor composite");
                else if (counter >= (limitCounter / 2))
                    Console.WriteLine(limitCounter + "\t");
            }
            Console.WriteLine();
        }
    }
}
```

OUTPUT:

```
Enter lowerlimit:1
Enter upperlimit:15
Prime number between 1and 15 are
1is neither prime nor composite
2
3
4
5
7
11
13
```

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:
V) Reverse a number and find sum of digits of a number.

CODE:

```
using System;
namespace reverseNumber
{
    class Program
    {
        static void Main(string[] args)
        {
            int num,actualnumber,revnum=0,digit,sumDigits=0;
            Console.Write("Enter number:");
            num = int.Parse(Console.ReadLine());
            actualnumber = num;
            while (num > 0)
            {
                digit = num % 10;
                revnum = revnum * 10 + digit;
                sumDigits=sumDigits+digit;
                num = num / 10;
            }
            Console.WriteLine("Reverse of " + actualnumber + "=" + revnum);
            Console.WriteLine("Sum of its digits:" + sumDigits);
        }
    }
}
```

OUTPUT:

Enter number:15
Reverse of 15=51
Sum of its digits:6

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:

V) Test for vowels.

CODE:

```
using System;
namespace vowels
{
    class Program
    {
        static void Main(string[] args)
        {
            char ch;
            Console.Write("Enter a character : ");
            ch = (char)Console.Read();
            switch (ch)
            {
                case 'a':
                case 'A':
                case 'e':
                case 'E':
                case 'i':
                case 'I':
                case 'o':
                case 'O':
                case 'u':
                case 'U':
                    Console.WriteLine(ch + "is vowel");
                    break;
                default:
                    Console.Write(ch + "is not a vowel");
                    break;
            }
            Console.ReadKey();
        }
    }
}
```

OUTPUT:

Enter a character : a
a is vowel

Enter a character : p
p is not a vowel

PRACTICAL NO. : 01(G)

AIM: Write programs using conditional statements and loops:

VII) Use of foreach loop with arrays.

CODE:

```
using System;
class ExampleForEach
{
    public static void Main()
    {
        string[] str = { "Shield", "Evaluation", "DX" };
        foreach (String s in str)
        {
            Console.WriteLine(s);
        }
    }
}
```

OUTPUT:

```
Shield
Evaluation
DX
```

PRACTICAL NO. : 02(1)

AIM: Write a program to declare a class 'staff' having data members as name and post. accept this data for 5 staffs and display names of staff who are HOD.

CODE:

```
using System;
namespace staff
{
    class staff
    {
        string name, post;
        public void getdata()
        {
            Console.WriteLine("Enter name and post:");
            name = Console.ReadLine();
            post = Console.ReadLine();
        }
        public void display()
        {
            Console.WriteLine(name + "\t\t" + post);
        }
        public string getPost()
        {
            return post;
        }
    }
    class program
    {
        static void Main(string[] args)
        {
            staff[] objStaff = new staff[5];
            int i;
            for (i = 0; i < 5; i++)
            {
                objStaff[i] = new staff();
                objStaff[i].getdata();
            }
            Console.WriteLine("Name \t\t Post");
            for (i = 0; i < 5; i++)
            {
                if (objStaff[i].getPost() == "HOD")
                    objStaff[i].display();
            }
        }
    }
}
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

OUTPUT:

Enter name and post:Prachit
HOD

Enter name and post:Sumit
PM

Enter name and post:Aniket
HOD

Enter name and post:Prathamesh
PM

Enter name and post:Zaid
CA

Name	Post
Prachit	HOD
Aniket	HOD

PRACTICAL NO. : 02(2)

AIM: Write a program to declare class 'Distance' have data members dist1,dist2 ,dist3. Initialize the two data members using constructor and store their addition in third data member using function and display addition.

CODE:

```
using System;
namespace distanceclass
{
    class Distance
    {
        int dist1,dist2,dist3;
        public Distance(int dist1,int dist2)
        {
            this.dist1=dist1;
            this.dist2=dist2;
        }
        public void addition()
        {
            dist3=dist1+dist2;
        }
        public void display()
        {
            Console.WriteLine("Distance1:"+ dist1);
            Console.WriteLine("Distance1:"+ dist2);
            Console.WriteLine("Distance1:"+ dist3);
        } }
    class program
    {
        static void Main(string[] args)
        {
            Distance objDistance = new Distance(10, 20);
            objDistance.addition();
            objDistance.display();
        } } }
```

OUTPUT:

Distance1:10
Distance1:20
Distance1:30

PRACTICAL NO. : 02(3)

AIM: Write a program using function overloading to swap two integer numbers and swap two float numbers.

CODE:


```
using System;
namespace swap
{
    class Overloading
    {
        public void swap(ref int n, ref int m)
        {
            int t;
            t = n;
            n = m;
            m = t;
        }
        public void swap(ref float f1, ref float f2)
        {
            float f;
            f = f1;
            f1 = f2;
            f2 = f;
        }
    }
    class program
    {
        static void Main(string[] args)
        {
            Overloading objOverloading = new Overloading();
            int n = 10, m = 20;
            objOverloading.swap(ref n, ref m);
            Console.WriteLine("N=" + n + "\tM=" + m);
            float f1 = 10.5f, f2 = 20.6f;
            objOverloading.swap(ref f1, ref f2);
            Console.WriteLine("F1=" + f1 + "\tF2=" + f2);
        } } }
}
```

OUTPUT:

N=20 M=10
F1=20.6 F2=10.5

PRACTICAL NO. : 02(4)

AIM: Write a program to implement single inheritance from following figure. Accept and display data for one table.

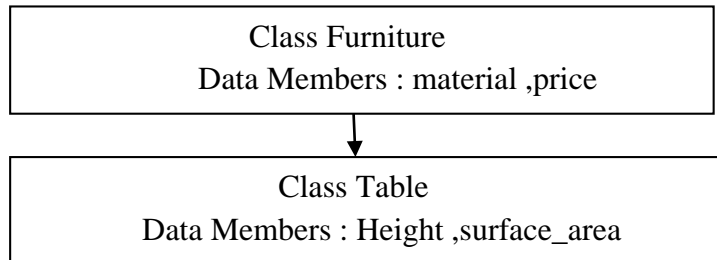

CODE:

Furniture.cs

```
using System;
namespace SingleInheritance
{
    class Furniture
    {
        string material;
        float price;
        public void getdata()
        {
            Console.Write("Enter material : ");
            material = Console.ReadLine();
            Console.Write("Enter price : ");
            price = float.Parse(Console.ReadLine());
        }
        public void showdata()
        {
            Console.WriteLine("Material : " + material);
            Console.WriteLine("Price : " + price);
        }
    }
}
```

Table.cs

```
using System;
namespace SingleInheritance
{
    class Table:Furniture
    {
        int height, surface_area;
        public void getdata()
        {
            base.getdata();
            Console.Write("Enter height: ");

            height = int.Parse(Console.ReadLine());
            Console.Write("Enter surface area: ");
        }
    }
}
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
        surface_area = int.Parse(Console.ReadLine());
    }
    public void showdata()
    {
        base.showdata();
        Console.WriteLine("Height : " + height);
        Console.WriteLine("Surface Area : " + surface_area);
    } } }
```

Program.cs

```
using System;
namespace SingleInheritance
{
    class Program
    {
        static void Main(string[] args)
        {
            Table t1 = new Table();
            t1.getdata();
            t1.showdata();
        } } }
```

OUTPUT:

Enter material : wood
Enter price : 1220
Enter height: 35
Enter surface area: 26
Material : wood
Price : 1220
Height : 35
Surface Area : 26

PRACTICAL NO. : 02(5)

AIM: Define a class 'salary' which will contain member variable Basic, TA, DA, HRA. Write a program using Constructor with default values for DA and HRA and calculate the salary of employee.

CODE:

Salary.cs

```
using System;
namespace SalaryConstructure
{
    class Salary
    {
        int basic, ta, da, hra;
        public Salary()
        {
            da = 9000;
            hra = 6000;
        }
        public void getdata()
        {
            Console.WriteLine("Enter basic salary : ");
            basic = int.Parse(Console.ReadLine());
            Console.WriteLine("Enter travelling allowance : ");
            ta = int.Parse(Console.ReadLine());
        }
        public void showdata()
        {
            Console.WriteLine("Basic salary : " + basic);
            Console.WriteLine("Dearness allowance : " + da);
            Console.WriteLine("Housing rent allowance : " + hra);
            Console.WriteLine("Travelling allowance : " + ta);
            Console.WriteLine("Gross Salary : " + (basic + da + hra + ta));
        }
    }
}
```

Program.cs

```
using System;
namespace SalaryConstructure
{
    class Program
    {
        static void Main(string[] args)
        {
            Salary s = new Salary();
            s.getdata();
            s.showdata();
        }
    }
}
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

OUTPUT:

Enter basic salary : 52000

Enter travelling allowance : 3000

Basic salary : 52000

Dearness allowance : 9000


Housing rent allowance : 6000

Travelling allowance : 3000

Gross Salary : 70000

PRACTICAL NO. : 02(6)

AIM: Program to implement the following multiple inheritance using interface.

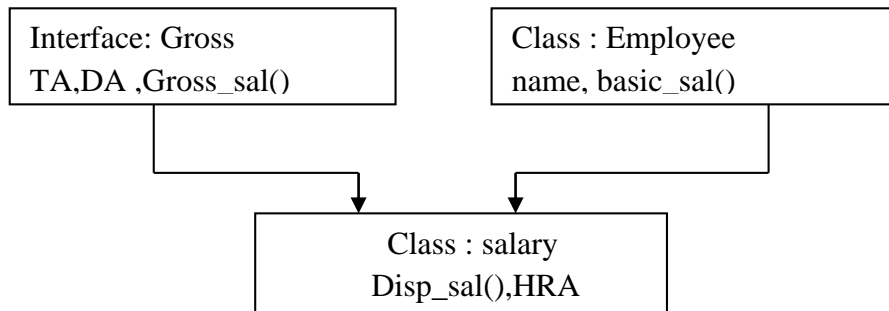

CODE:

Gross.cs

```
using System;
namespace MultipleInheritance
{
    interface Gross
    {
        int ta
        {
            get;
            set;
        }
        int da
        {
            get;
            set;
        }
        int GrossSal();
    }
}
```

Employee.cs

```
using System;
namespace MultipleInheritance
{
    class Employee
    {
        string name;
        public Employee(string name)
        { this.name = name; }
        public int BasicSal(int basicSal)
        { return basicSal; }
        public void ShowData()
        {
            Console.WriteLine("Name : " + name);
        }
    }
}
```

Salary.cs

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
using System;
namespace MultipleInheritance
{
    class Salary:employee,Gross
    {
        int hra;
        public Salary(string name, int hra):base(name)
        { this.hra = hra; }
        public int ta
        {
            get {return S_ta; }
            set { S_ta = value; }
        }
        private int S_ta;
        public int da
        {
            get { return S_da; }
            set { S_da = value; }
        }
        private int S_da;
        public int GrossSal()
        {
            int gSal;
            gSal = hra + ta + da + BasicSal(15000);
            return gSal;
        }
        public void dispSal()
        { base.ShowData();
          Console.WriteLine("Gross Sal : " + GrossSal());
        } } }
}
```

Program.cs


```
using System;
namespace MultipleInheritance
{
    class Program
    {
        static void Main(string[] args)
        {
            Salary s = new Salary("Prachit", 35000);
            s.da = 20000;
            s.ta = 30000;
            s.dispSal();
        } } }
}
```

OUTPUT:

Name :Prachit
Gross Sal :100000

PRACTICAL NO. : 02(7)

AIM: Write a program for above class hierarchy for the Employee where the base class is Employee and derived class and Programmer and Manager. Here make display function virtual which is common for all and which will display information of Programmer and Manager interactively.

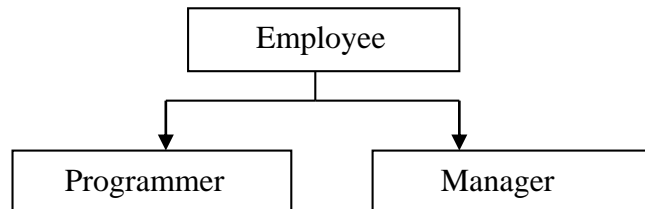

CODE:

Employee.cs

```
using System;
namespace HeirarchicalInheritance
{
    class employee
    {
        public virtual void display()
        {
            Console.WriteLine("Display of employee class called ");
        }
    }
}
```

Programmer.cs

```
using System;
namespace HeirarchicalInheritance
{
    class Programmer:employee
    {
        public void display()
        {
            Console.WriteLine(" Display of Programmer class called ");
        }
    }
}
```

Manager.cs

```
using System;
namespace HeirarchicalInheritance
{
    class Manager
    {
        public void display()
        {
            Console.WriteLine("Display of manager class called ");
        }
    }
}
```

Program.cs

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
using System;
namespace HeirarchicalInheritance
{
    class Program
    {
        static void Main(string[] args)
        {
            Programmer objProgrammer;
            Manager objManager;
            Console.Write("Whose details you want to use to see \n 1.Programmer \n
2.Manager");
            int choice=int.Parse(Console.ReadLine());
            if(choice==1)
            {
                objProgrammer=new Programmer();
                objProgrammer.display();
            }
            else if(choice==2)
            {
                objManager=new Manager();
                objManager.display();
            }
            else
            {
                Console.WriteLine("Wrong choice entered");
            }
        }
    }
}
```

OUTPUT:

Whose details you want to use to see

1.Programmer

2.Manager1

Display of Programmer class called

Whose details you want to use to see

1.Programmer

2.Manager2

Display of manager class called

Whose details you want to use to see


1.Programmer

2.Manager6

Wrong choice entered

PRACTICAL NO. : 02(8)

AIM: Write a program to implement multilevel inheritance from following figure. Accept and display data for one student.

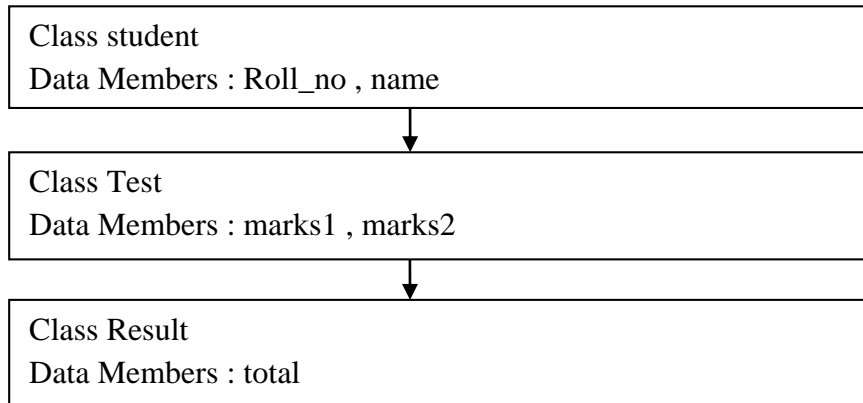

CODE:

Result.cs

```
using System;
namespace multilevelinheritance
{
    class Result:Test
    {
        int total;
        public Result(int roll_no, string name, int marks1, int marks2)
            : base(roll_no, name, marks1, marks2)
        {
            total = getMarks1() + getMarks2();
        }
        public void display()
        {
            base.display();
            Console.WriteLine("Total: " + total);
        }
    }
}
```

Test.cs

```
using System;
namespace multilevelinheritance
{
    class Test:student
    {
        int marks1, marks2;
        public Test(int roll_no, string name, int marks1, int marks2)
            : base(roll_no, name)
        {
            this.marks1 = marks1;
            this.marks2 = marks2;
        }
    }
}
```

ASP.NET WITH C#
TYBSC-IT (SEM V)

```
    }  
    public int getMarks1()  
    {  
        return marks1;  
    }  
    public int getMarks2()  
    {  
        return marks2;  
    }  
    public void display()  
    {  
        base.display();  
        Console.WriteLine("Marks1: " + marks1);  
        Console.WriteLine("Marks2: " + marks2);  
    } } }
```

Student.cs

```
using System;  
namespace multilevelinheritance  
{  
    class student  
    {  
        int roll_no;  
        string name;  
  
        public student(int roll_no, string name)  
        {  
            this.roll_no = roll_no;  
            this.name = name;  
        }  
        public student() { }  
        public void display()  
        {  
            Console.WriteLine("Roll no: " + roll_no);  
            Console.WriteLine("Name: " + name);  
        } } } }
```

Program.cs

```
using System;  
namespace multilevelinheritance  
{  
    class Program  
    {  
        static void Main(string[] args)  
        {  
            Result r1 = new Result(101, "Prachit", 50, 70);  
            r1.display();  
        } } } }
```

OUTPUT:

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

Roll no: 101

Name: Prachit

Marks1: 50

Marks2: 70

Total: 120

PRACTICAL NO. : 02(9)

AIM: Write a program to create a delegate called TrafficDel and a class called TrafficSignal with the following delegate methods.

```
Public static void Yellow()  
{  
Console.WriteLine("Yellow Light Signal To Get Ready");  
}
```

```
Public static void Green()  
{  
Console.WriteLine("Green Light Signal To Go");  
}
```

```
Public static void Red()  
{  
Console.WriteLine("Red Light Signal To Stop");  
}
```

Also include a method IdentifySignal() to initialize an array of delegate with the above methods and a method show() to invoke members of the above array.

CODE:

TrafficSignal.cs

```
using System;  
namespace TrafficDelegateExample  
{  
    public delegate void TrafficDel();  
    class TrafficSignal  
    {  
        public static void Yellow()  
        {  
            Console.WriteLine("Yellow light signals to get ready");  
        }  
        public static void Green()  
        {  
            Console.WriteLine("Green light signals to go");  
        }  
        public static void Red()  
        {  
            Console.WriteLine("Red light signals to stop");  
        }  
        TrafficDel[] td = new TrafficDel[3];  
        public void IdentifySignal()  
        {  
            td[0] = new TrafficDel(Yellow);  
            td[1] = new TrafficDel(Green);  
  
            td[2] = new TrafficDel(Red);  
        }  
    }  
}
```

ASP.NET WITH C#
TYBSC-IT (SEM V)

```
    }  
    public void display()  
    {  
        td[0]();  
        td[1]();  
        td[2]();  
    }  
} }
```

Program.cs

```
using System;  
namespace TrafficDelegateExample  
{  
    class Program  
    {  
        static void Main(string[] args)  
        {  
            TrafficSignal ts = new TrafficSignal();  
            ts.IdentifySignal();  
            ts.display();  
        } } } }
```

OUTPUT:

Yellow light signals to get ready
Green light signals to go
Red light signals to stop

PRACTICAL NO. : 02(10)

AIM: Write a program to accept a number from the user and throw an exception if the number is not an even number.

CODE:

NotEvenException.cs

```
using System;
namespace ExceptionHandlingExample
{
    class NotEvenException:Exception
    {
        public NotEvenException(string msg)
            : base(msg)
        {
        }
    }
}
```

Program.cs

```
using System;
namespace ExceptionHandlingExample
{
    class Program
    {
        static void Main(string[] args)
        {
            int num;
            try
            {
                Console.Write("Enter a number: ");
                num = int.Parse(Console.ReadLine());
                if ((num % 2) != 0) throw new NotEvenException("Not an even number ");
                else
                    Console.WriteLine("Its even number ");
            }
            catch (NotEvenException e) { Console.WriteLine(e.Message); }
        }
    }
}
```

OUTPUT:


Enter a number: 5
Not an even number

Enter a number: 6
Its even number

PRACTICAL NO. : 03(1)

AIM: Create an application that allows the user to enter a number in the textbox named 'getnum'. Check whether the number in the textbox 'getnum' is palindrome or not. Print the message accordingly in the label control named lbldisplay when the user clicks on the button 'check'.

DESIGN:

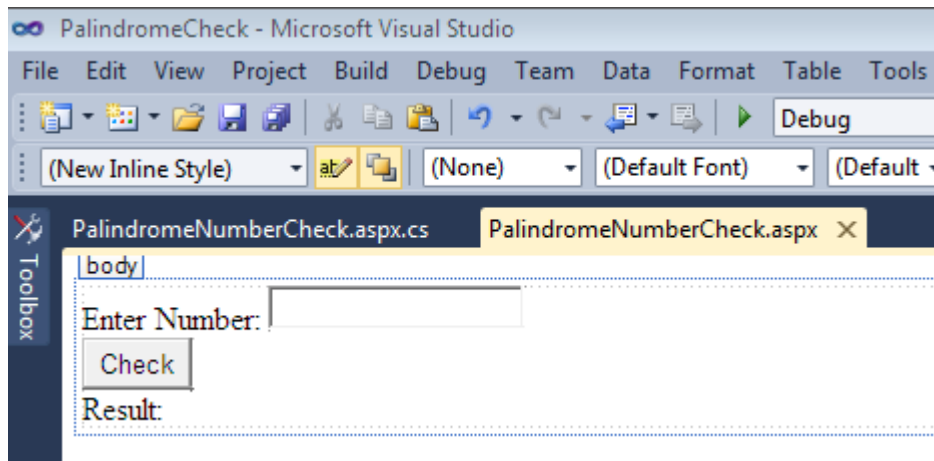

PROPERTIES TABLE:

Control	Property	Value
Label1	Text	Enter Number
	ID	lblnum1
TextBox	ID	getNum
Button	Text	Check
	ID	btncheck
Label2	Text	Result
	ID	lblnum2

CODE:


```
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace PalindromeCheck
{
    public partial class PalindromeNumberCheck : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }
        protected void btncheck_Click(object sender, EventArgs e)
        {
            int num = int.Parse(getNum.Text);
            int n, rev = 0, d;
```


**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
n = num;
while (n > 0)
{
    d = n % 10;
    n = n / 10;
    rev = rev * 10 + d;
}
if (rev == num)

    lblnum2.Text = lblnum2.Text + num + " is a Palindrome number.";
else
    lblnum2.Text = lblnum2.Text + num + " is not a Palindrome number.";
} } }
```


BROWSER OUTPUT:

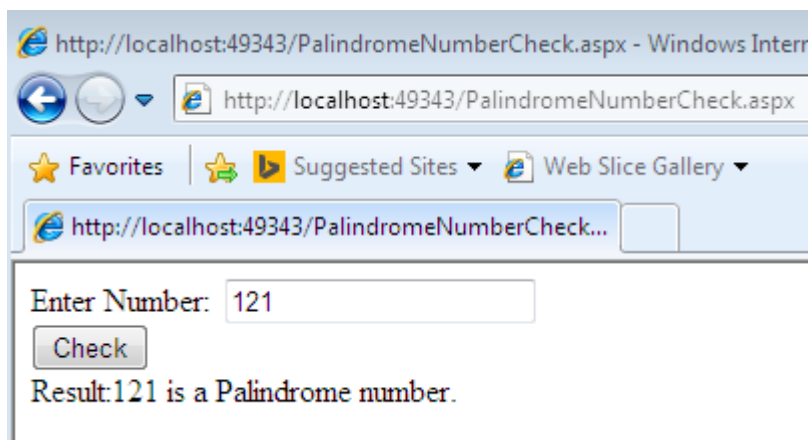

PRACTICAL NO. : 03(2)

AIM: Create an application which will ask the user to input his name and a message, display the two items concatenated in a label, and change the format of the label using radio buttons and check boxes for selection , the user can make the label text bold ,underlined or italic and change its color . include buttons to display the message in the label, clear the text boxes and label and exit.

DESIGN:

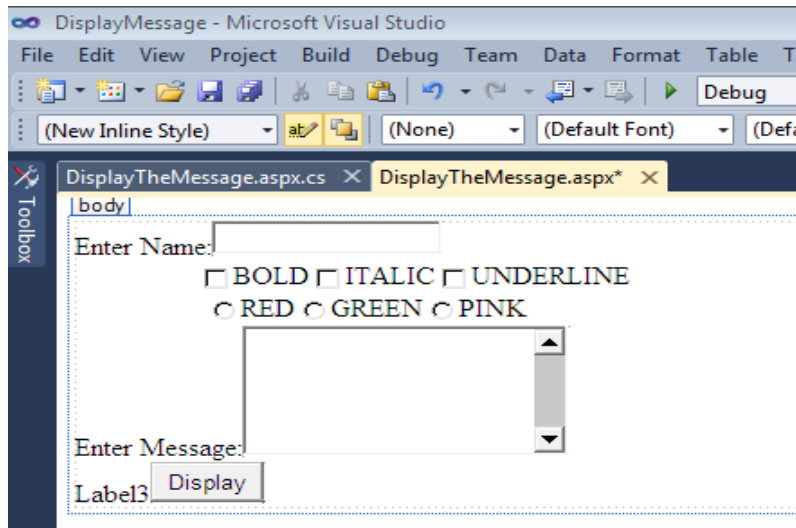

PROPERTIES TABLE:

Control	Property	Value
Label1	ID	lbl1
	Text	Enter Name
Checkbox1	ID	chkbold
	Text	BOLD
Checkbox2	ID	chkitalic
	Text	ITALIC
Checkbox3	ID	chkunderline
	Text	UNDERLINE
RadioButton1	ID	rbred
	Text	RED
RadioButton2	ID	rbgreen
	Text	GREEN
RadioButton3	ID	rbpink
	Text	PINK
Label2	ID	txtmessage
	Text	Enter Message
Button	ID	btndisplay
	Text	Display
Label3	ID	lblDisplay
	Text	Label3

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

CODE:

```
using System;
namespace DisplayMessage
{
    public partial class DisplayTheMessage : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }
        protected void btndisplay_Click(object sender, EventArgs e)
        {
            if (chkbold.Checked == true)
                lblDisplay.Font.Bold = true;
            else
                lblDisplay.Font.Bold = false;

            if (chkitalic.Checked == true)
                lblDisplay.Font.Italic = true;
            else
                lblDisplay.Font.Italic = false;

            if (chkunderline.Checked == true)
                lblDisplay.Font.Underline = true;
            else
                lblDisplay.Font.Underline = false;
            if (rbred.Checked == true)
                lblDisplay.ForeColor = System.Drawing.Color.Red;
            else if (rbgreen.Checked == true)
                lblDisplay.ForeColor = System.Drawing.Color.Green;
            else if (rbpink.Checked == true)
                lblDisplay.ForeColor = System.Drawing.Color.Pink;
            lblDisplay.Text = "Name:" + txtName.Text + "<br/>" + "Message:" +
txtMessage.Text;
        } } }
```

BROWSER OUTPUT:

ASP.NET WITH C# TYBSC-IT (SEM V)

http://localhost:49383/DisplayTheMessage.aspx - Windows Internet Explorer

http://localhost:49383/DisplayTheMessage.aspx

Enter Name: PRACHIT

BOLD ITALIC UNDERLINE

RED GREEN PINK

We Can WE Will

Enter Message:


Name:PRACHIT

Message:We Can WE Will

PRACTICAL NO. : 03(3)

AIM: List of employees is available in listbox. Write an application to add selected or all records from listbox (assume multi-line property of textbox is true).

DESIGN:

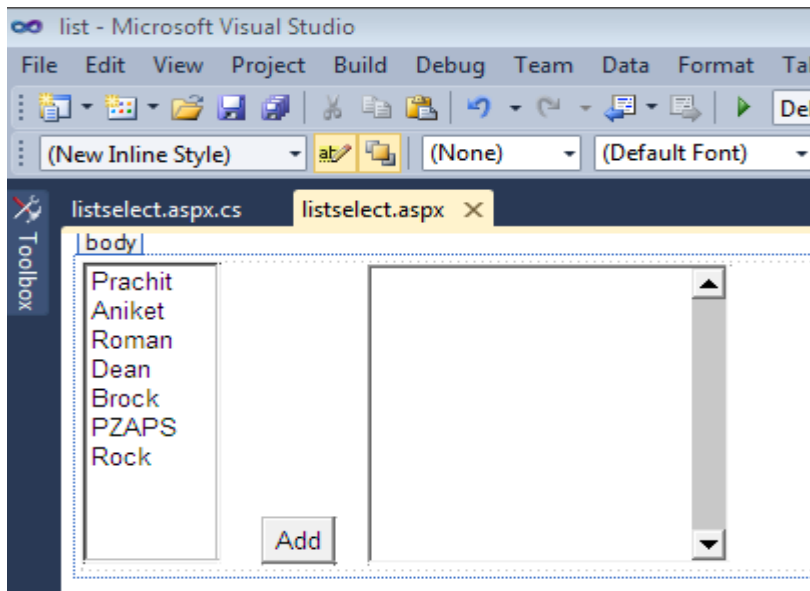


PROPERTIES TABLE:

CODE:

```
using System;
namespace list
{
    public partial class listselect : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }
        protected void btnAdd_Click(object sender, EventArgs e)
        {
            int i;
            for (i = 0; i < lstEmployee.Items.Count; i++)
            {
                if (lstEmployee.Items[i].Selected == true)
                    txtEmployee.Text += lstEmployee.Items[i].Text + "\n";
            }
        }
    }
}
```


BROWSER OUTPUT:

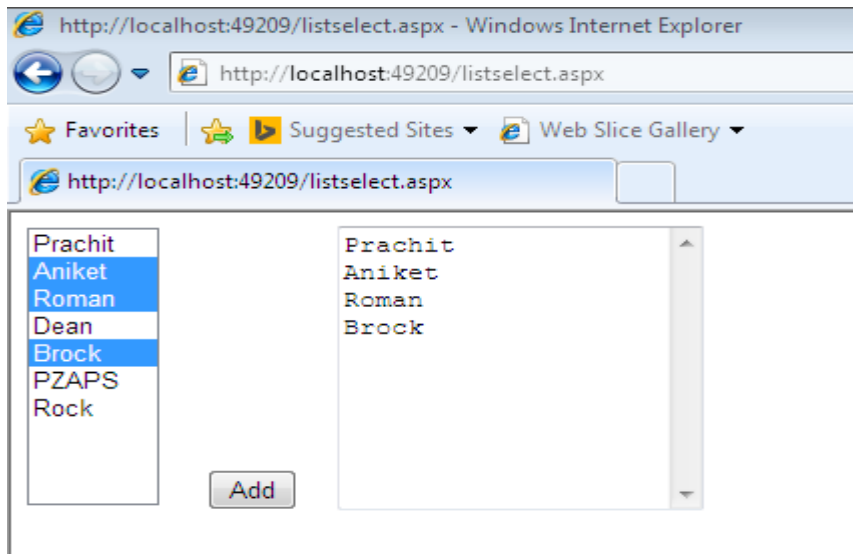

PRACTICAL NO. : 03(4)

AIM: “How is the book ASP.NET with c# by Vipul Prakashan?” Give the user three choice :
i)Good ii)Satisfactory iii)Bad. Provide a VOTE button. After user votes, present the result in percentage using labels next to the choices.

DESIGN:

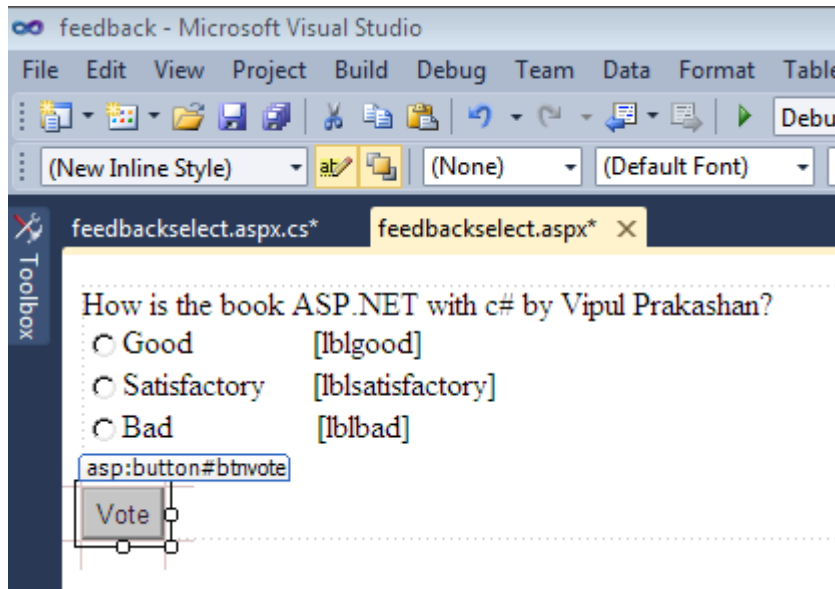

PROPERTIES TABLE:

Control	Property	Value
Label1	ID	lbltxt1
	Text	How is the Book ASP.NET with c# Vipul Prakashan
RadioButton1	ID	rdogood
	Text	Good
RadioButton2	ID	rdosatisfactory
	Text	Satisfactory
RadioButton3	ID	rdobad
	Text	Bad
Label2	ID	lblgood
	Text	
Label3	ID	blsatisfactory
	Text	
Label4	ID	lblbad
	Text	
Button	ID	btnvote
	Text	Vote

CODE:


```
using System;
namespace feedback
{
    public partial class feedbackselect : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }
        protected void btnvote_Click(object sender, EventArgs e)
        {
            if (rdogood.Checked == true)
            {
                int goodCount;
                if (ViewState["gcount"] != null)
                    goodCount = Convert.ToInt32(ViewState["gcount"]) + 1;
                else
                    goodCount = 1;
                ViewState["gcount"] = goodCount;
            }

            if (rdosatisfactory.Checked == true)
            {
                int satisfactoryCount;
                if (ViewState["scount"] != null)
                    satisfactoryCount = Convert.ToInt32(ViewState["scount"]) + 1;
                else
                    satisfactoryCount = 1;
                ViewState["scount"] = satisfactoryCount;
            }
            if (rdobad.Checked == true)
            {
                int badCount;
                if (ViewState["bcount"] != null)
                    badCount = Convert.ToInt32(ViewState["bcount"]) + 1;
                else
                    badCount = 1;
                ViewState["bcount"] = badCount;
            }
            int totalCount;
            if (ViewState["count"] != null)
                totalCount = Convert.ToInt32(ViewState["count"]) + 1;
            else
                totalCount = 1;
            ViewState["count"] = totalCount;
            double gper = (Convert.ToDouble(ViewState["gcount"]) /
            Convert.ToDouble(ViewState["count"])) * 100.0f;
        }
    }
}
```


**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
lblgood.Text = gper.ToString() + "%";  
    double sper = (Convert.ToDouble(ViewState["scount"]) /  
Convert.ToDouble(ViewState["count"])) * 100.0f;  
    lblsatisfactory.Text = sper.ToString() + "%";  
    double bper = (Convert.ToDouble(ViewState["bcount"]) /  
Convert.ToDouble(ViewState["count"])) * 100.0f;  
    lblbad.Text = bper.ToString()+"%";  
  
    } } }
```


BROWSER OUTPUT:

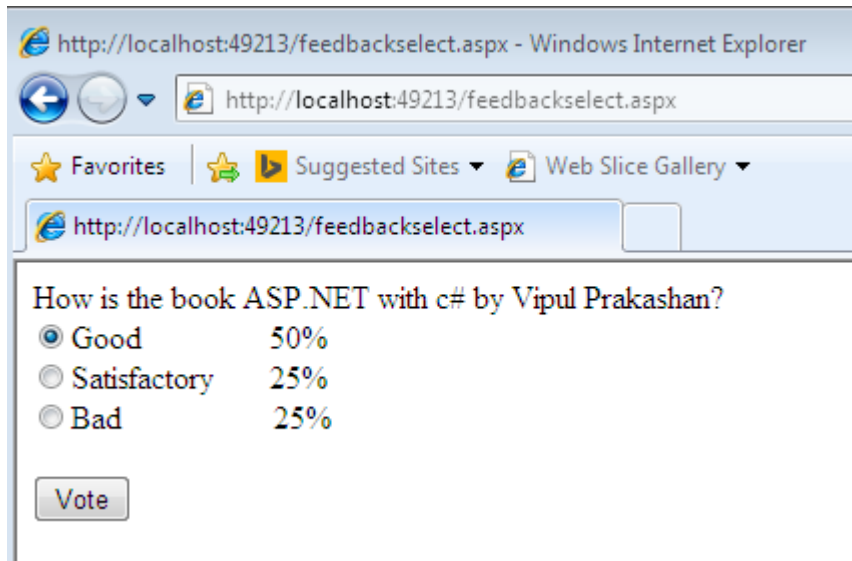

PRACTICAL NO. : 03(5)

AIM: Create a project that calculates the total of fat, carbohydrate and protein. Allow the user to enter into text boxes. The grams of fat, grams of carbohydrate and grams of protein. Each gram of fat is 9 calories and protein or carbohydrate is 4 calories. Display the total calories of the current food item in a label. Use to other labels to display and accumulated some of calories and the count of items entered. The form food have 3 text boxes for the user to enter the grams for each category include label next to each text box indicating what the user is enter.

DESIGN:

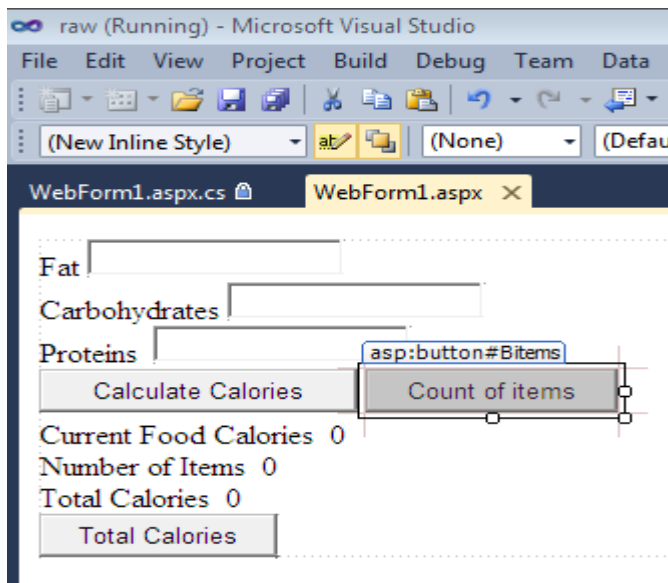

PROPERTIES TABLE:


CODE:

```
using System;
namespace raw
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }
        int curr_cal, total_cal, total_items;
        protected void Bcalories_Click(object sender, EventArgs e)
        {
            curr_cal = (Convert.ToInt32(txtfat.Text) * 9 + Convert.ToInt32(txtcarbo.Text) * 4 +
            Convert.ToInt32(txtpro.Text) * 4);
            lblcfc.Text = Convert.ToString(curr_cal);
            lblnof.Text = Convert.ToString(total_cal);
        }
    }
}
```

ASP.NET WITH C# TYBSC-IT (SEM V)

```
        lbltc.Text = Convert.ToString(total_items);
    }
    protected void Bitems_Click(object sender, EventArgs e)
    {
        lblnof.Text = Convert.ToString(Convert.ToInt32(lblnof.Text) + 1);
    }
    protected void Btotalcalo_Click(object sender, EventArgs e)
    {
        lbltc.Text = Convert.ToString(Convert.ToInt32(lbltc.Text) +
        Convert.ToInt32(lblcfc.Text));
    }
    }
    }
}
```


BROWSER OUTPUT:

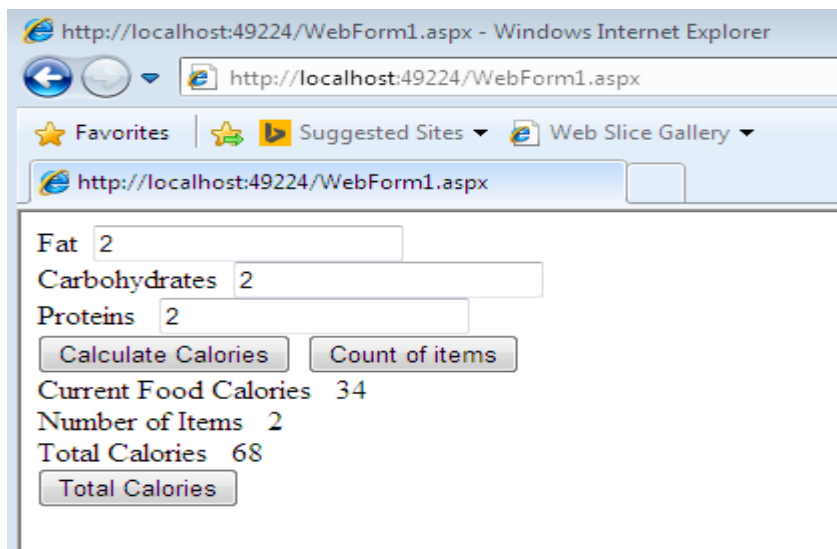

PRACTICAL NO. : 04(1)

AIM: Set the label border color of rollno to red using css.

DESIGN:

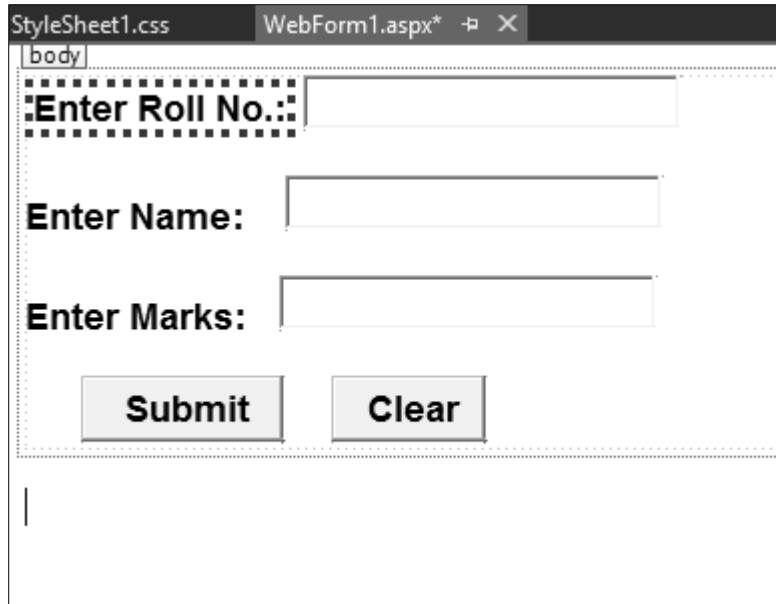

PROPERTY TABLE :

Control	Property	Value
Label1	ID	lblRollNo
Label1	Text	Enter Roll No.
Label1	BorderStyle	Dotted
Label1	BackColor	Coral
Label2	ID	lblName
Label2	Text	Enter Name
Label3	ID	lblMarks
Label3	Text	Enter Marks
TextBox1	ID	txtRollNo
TextBox2	ID	txtName
TextBox3	ID	txtMarks
Button1	ID	btnSubmit
Button1	Text	Submit


CODE:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="cssexample.aspx.cs"
Inherits="practical4css.cssexample" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title></title>
```


PRACTICAL NO. : 04(2)

AIM: Set the font-Arial , font style-bond , font size-18px of different controls(ie. Label, textbox, button) using css.

DESIGN:

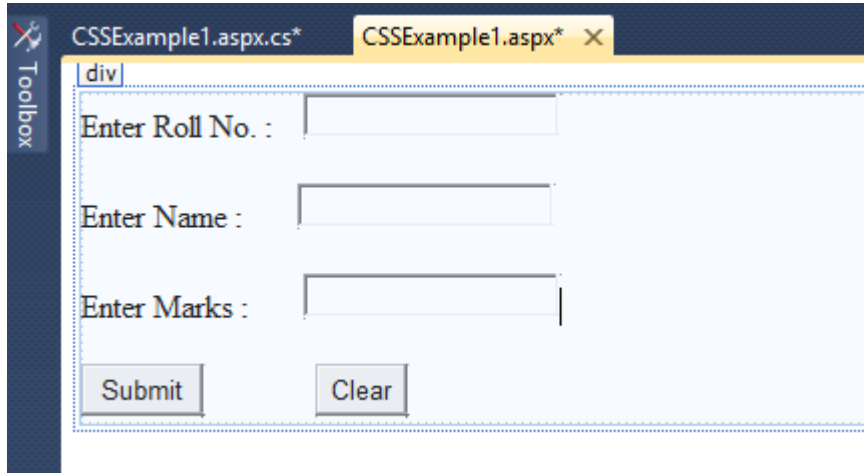

PROPERTY TABLE :

Control	Property	Value
Label1	ID	lblRollNo
Label1	Text	Enter Roll No.
Label1	BorderStyle	Dotted
Label1	BackColor	Coral
Label2	ID	lblName
Label2	Text	Enter Name
Label2	CssClass	Common
Label3	ID	lblMarks
Label3	Text	Enter Marks
Label3	CssClass	Common
TextBox1	ID	txtRollNo
TextBox1	CssClass	Txt Style
TextBox2	ID	txtName
TextBox2	CssClass	Txt Style
TextBox3	ID	txtMarks
TextBox3	CssClass	Txt Style
Button1	ID	btnSubmit
Button1	Text	Submit
Button1	CssClass	btnStyle
Button2	ID	btnClear
Button2	Text	Clear
Button2	CssClass	btnStyle

CODE:

ASP.NET WITH C# TYBSC-IT (SEM V)

Myformat.css

```
.BtnStyle
{
font-family:Times New Roman;
font-size:large;
font-weight:bold;
}
.TxtStyle
{
font-family:Georgia;
font-size:larger;
font-weight:400;
background-color:Maroon;
border:2px solid goldenrod;
}
.Common
{
background-color:Aqua;
color:Red;
font-family:Courier New;
font-size:20px;
font-weight:bolder;
}
```



Myformatting.aspx

```
<% @ Page Language="C#" AutoEventWireup="true" CodeBehind="cssexample.aspx.cs"
Inherits="practical4css.cssexample" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title></title>
<body>
<form id="form1" runat="server">
<div>
<asp:Label ID="Label1" runat="server" Text="Enter Roll No.:" BorderStyle="Dotted"
BackColor="Coral"></asp:Label>
<asp:TextBox ID="TextBox1" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br />
<asp:Label ID="Label2" runat="server" Text="Enter Name:"
CssClass="Common"></asp:Label>
<asp:TextBox ID="TextBox2" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br />
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**


```
<asp:Label ID="Label3" runat="server" Text="Enter Marks:"  
CssClass="Common"></asp:Label>  
<asp:TextBox ID="TextBox3" runat="server" CssClass="TxtStyle"></asp:TextBox>  
<br />  
<br />  
<asp:Button ID="Button1" runat="server" Text="Submit" CssClass="BtnStyle" />  
<asp:Button ID="Button2" runat="server" Text="Clear" CssClass="BtnStyle" />  
</div>  
</form>  
</body>  
</html>
```

BROWSER OUTPUT:

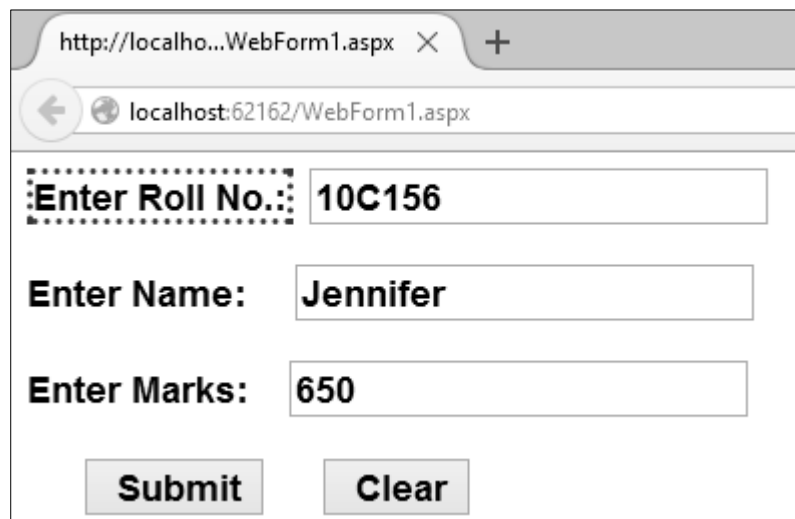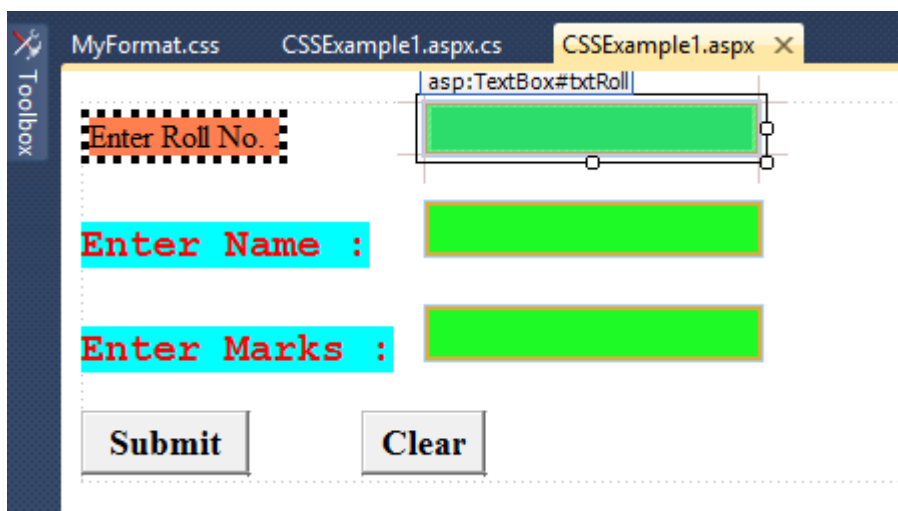

PRACTICAL NO. : 04(3)

AIM: Design the same webpages for BMS, BAF, BscIT students and apply same background color for all the pages using css.

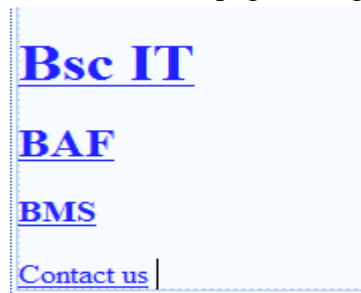

PROPERTY TABLE :

Control	Property	Value
Label1	ID	lblBScIT
Label1	Text	Welcome to BScIT
Label1	CssClass	bk

Control	Property	Value
Label1	ID	lblBAF
Label1	Text	Welcome to BMS
Label1	CssClass	bk

Control	Property	Value
Label1	ID	lblBMS
Label1	Text	Welcome to BAF
Label1	CssClass	bk

CODE:

Myformat.css

```
.BtnStyle
{
font-family:Times New Roman;
font-size:large;
font-weight:bold;
}
.TxtStyle
{
font-family:Georgia;
font-size:larger;
font-weight:400;
background-color:Lime;
border:2px solid goldenrod;
}
.Common
{
```

ASP.NET WITH C# TYBSC-IT (SEM V)

```
background-color:Aqua;
color:Red;
font-family:Courier New;
font-size:20px;
font-weight:bolder;
}
.bk
{
background-color:Lime;
}
```





BScIT.aspx

```
<% @ Page Language="C#" AutoEventWireup="true" CodeBehind="BScIT.aspx.cs"
Inherits="cssExample.BScIT" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title></title>
  <link rel="stylesheet" type="text/css" href="MyFormat.css" />
</head>
<body text="Welcome to BScIT">
  <form id="form1" runat="server">
    <div class="bk">
      <asp:Label ID="lblBScIT" runat="server" Text="Welcome to BscIT"></asp:Label>
    </div>
  </form>
</body>
</html>
```

BAF.aspx

```
<% @ Page Language="C#" AutoEventWireup="true" CodeBehind="BAF.aspx.cs"
Inherits="cssExample.BAF" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title></title>
  <link rel="stylesheet" type="text/css" href="MyFormat.css" />
</head>
<body>
  <form id="form1" runat="server">
    <div class="bk">
      <asp:Label ID="lblBAF" runat="server" Text="Welcome to BAF"></asp:Label>
    </div>
  </form>
</body>
```



ASP.NET WITH C#
TYBSC-IT (SEM V)

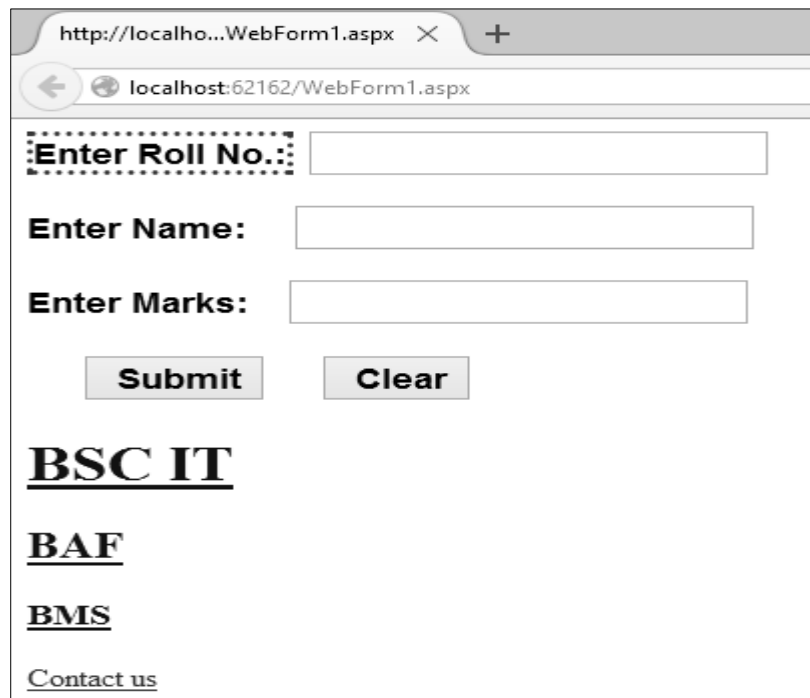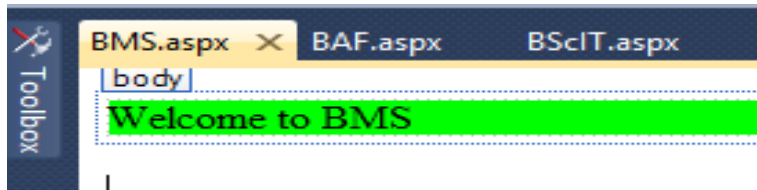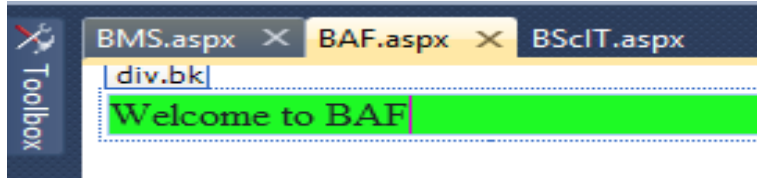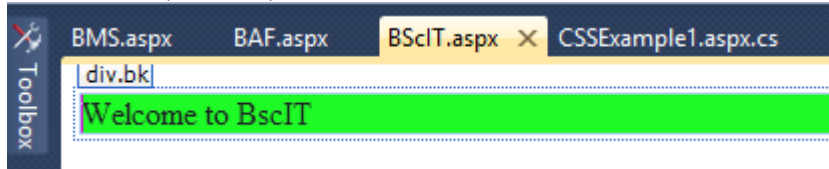


ASP.NET WITH C#
TYBSC-IT (SEM V)




Welcome to BScIT

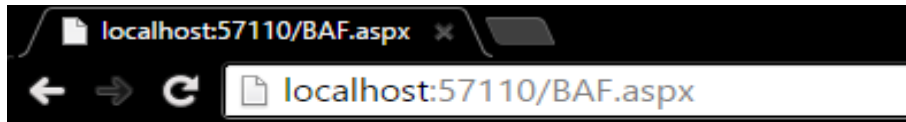

Welcome to BAF

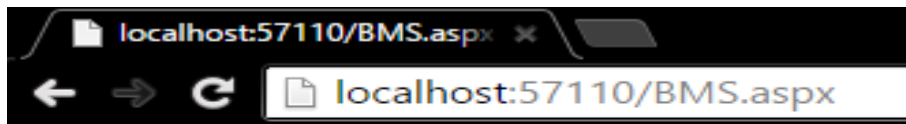


Welcome to BMS

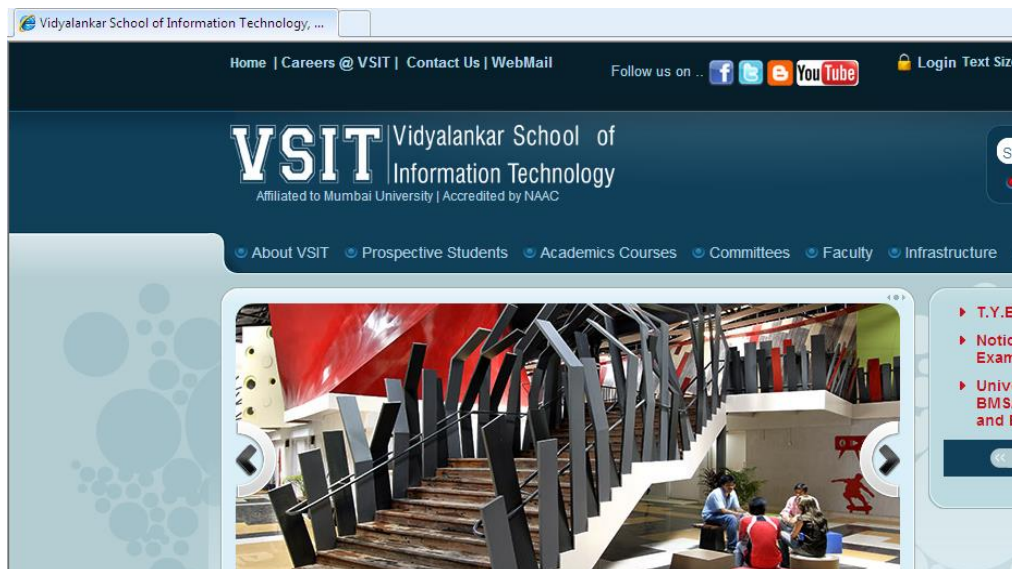

PRACTICAL NO. : 04(4)

AIM: Change the font family and color of all heading of above webpage using css.

DESIGN:

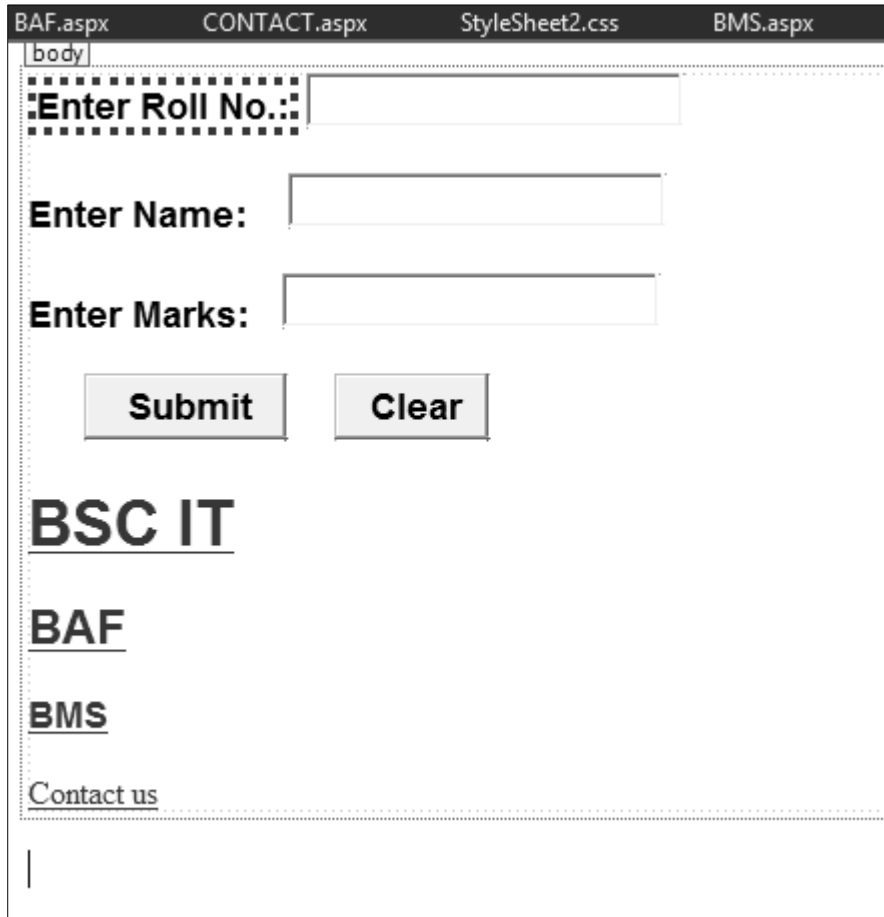

CODE:

myformatting.aspx

```
<% @ Page Language="C#" AutoEventWireup="true" CodeBehind="myformatting.aspx.cs"
Inherits="WebApplication1.myformatting" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title></title>
<link rel="stylesheet" type="text/css" href="MyFormat.css" />
<style type="text/css">
h1,h2,h3{color:Blue; font-family:Agency FB;}
</style>
</head>
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
<body>
<form id="form1" runat="server">
<div>
<asp:Label ID="Label1" runat="server" Text="Enter Roll No.:" BorderStyle="Dotted"
BackColor="Coral"></asp:Label>
<asp:TextBox ID="TextBox1" runat="server" CssClass="TxtStyle"></asp:TextBox>

<br />
<asp:Label ID="Label2" runat="server" Text="Enter Name:"
CssClass="Common"></asp:Label>
<asp:TextBox ID="TextBox2" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br />
<asp:Label ID="Label3" runat="server" Text="Enter Marks:"
CssClass="Common"></asp:Label>
<asp:TextBox ID="TextBox3" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br />
<br />

<asp:Button ID="Button1" runat="server" Text="Submit" CssClass="BtnStyle" />
<asp:Button ID="Button2" runat="server" Text="Clear" CssClass="BtnStyle" />
<h1><a href="bscit.aspx"></a>Bsc IT</h1>
<h2><a href="baf.aspx"></a>BAF</h2>
<h3><a href="bms.aspx"></a>BMS</h3>
<a href="http://www.vsit.edu.in/">
Contact us</a>
<br />
<br />
<br />
<br />
</div>
</form>
</body>
</html>
```

BROWSER OUTPUT:

http://localho...WebForm1.aspx × +

localhost:62162/WebForm1.aspx

Enter Roll No.:

Enter Name:

Enter Marks:

BSC IT

BAF


BMS

Contact us

PRACTICAL NO. : 04(5)

AIM: Use pseudo classes and display link, visited link and active link of contact us differently.

DESIGN:

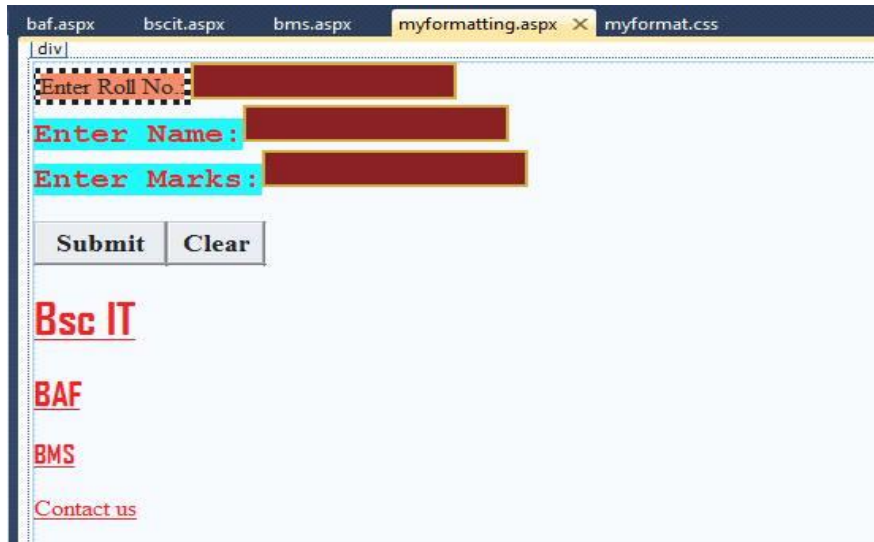

CODE:

myformatting.aspx


```
<% @ Page Language="C#" AutoEventWireup="true" CodeBehind="myformatting.aspx.cs"
Inherits="WebApplication1.myformatting" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title></title>
<link rel="Stylesheet" type="text/css" href="MyFormat.css" />
<style type="text/css">
h1,h2,h3{color:Blue; font-family:Agency FB;}
A:link{color:Red;}
A:visited{color:Green;}
A:active{color:Orange;}
</style>
</head>

<body>
<form id="form1" runat="server">
<div>
<asp:Label ID="Label1" runat="server" Text="Enter Roll No.:" BorderStyle="Dotted"
BackColor="Coral"></asp:Label>
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
<asp:TextBox ID="TextBox1" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br />
<asp:Label ID="Label2" runat="server" Text="Enter Name:"
CssClass="Common"></asp:Label>
<asp:TextBox ID="TextBox2" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br />
<asp:Label ID="Label3" runat="server" Text="Enter Marks:"
CssClass="Common"></asp:Label>
<asp:TextBox ID="TextBox3" runat="server" CssClass="TxtStyle"></asp:TextBox>
<br /><br />
<asp:Button ID="Button1" runat="server" Text="Submit" CssClass="BtnStyle" />
<asp:Button ID="Button2" runat="server" Text="Clear" CssClass="BtnStyle" />
<h1><a href="bscit.aspx"></a>Bsc IT</h1>
<h2><a href="baf.aspx"></a>BAF</h2>
<h3><a href="bms.aspx"></a>BMS</h3>
<a href="http://www.vsit.edu.in/">
Contact us</a>
<br /><br /><br /><br />
</div>
</form>
</body>
</html>
```

BROWSER OUTPUT:

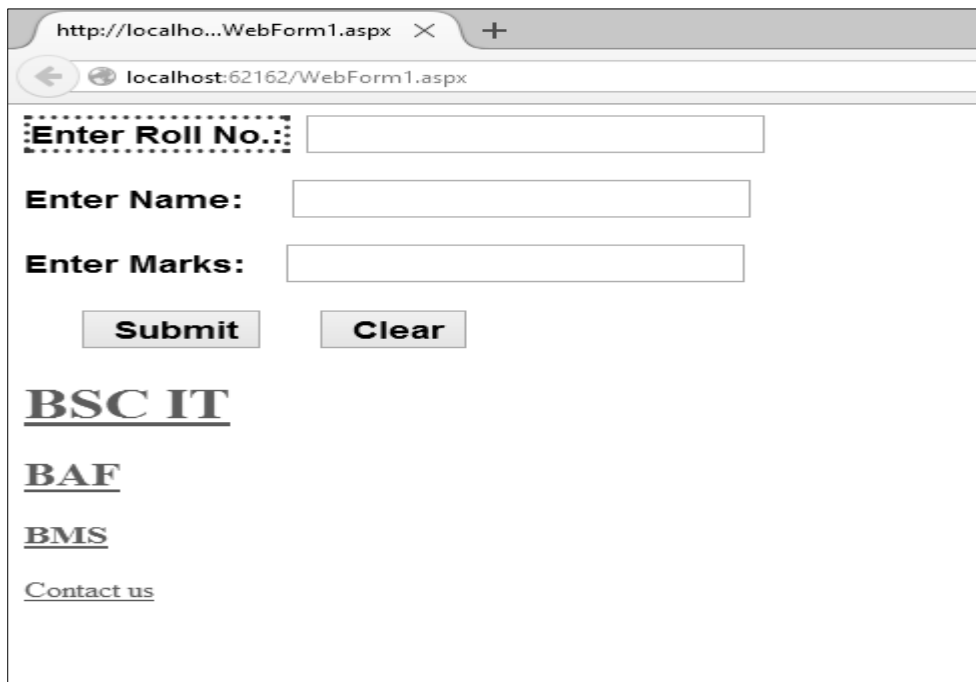

PRACTICAL NO. : 05(1)

AIM: Programs using ASP.NET Server controls.

Create the application that accepts name, password ,age , email id, and user id. All the information entry is compulsory. Password should be reconfirmed. Age should be within 21 to 30. Email id should be valid. User id should have at least a capital letter and digit as well as length should be between 7 and 20 characters.

DESIGN:

The screenshot shows a web browser window displaying a validation form titled 'ValidationForm.aspx'. The form contains five input fields and a 'Button' at the bottom. Each input field has red error messages displayed below it:

- Enter Password:** Password Required Enter Required
- Confirm Password:** Password Required Enter Same Password
- Enter Your Age:** Enter Age Age Required Age should be between 21 to 30
- Enter Your Email Id:** Email Id Required Email Id should should be proper
- User Id:** User Id Required UserId should write properly

CODE:

ValidateControlForm.aspx

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace ValidationControl
{
    public partial class ValidationControlForm : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

```

ASP.NET WITH C#
TYBSC-IT (SEM V)

```
    }  
    protected void CustomValidator1_ServerValidate(object source,  
ServerValidateEventArgs args)  
    {  
        string str = args.Value;  
        args.IsValid = false;  
        if (str.Length < 7 || str.Length > 20)  
        {  
            return;  
        }  
        bool capital = false;  
        foreach (char ch in str)  
        {  
            if (ch >= 'A' && ch <= 'Z')  
            {  
                capital = true;  
                break;  
            }  
        }  
        if (!capital)  
            return;  
        bool digit = false;  
        foreach (char ch in str)  
        {  
            if (ch >= '0' && ch <= '9')  
            {  
                digit = true;  
                break;  
            }  
        }  
        if (!digit)  
            return;  
        args.IsValid = true;  
    }  
    protected void btnSubmit_Click(object sender, EventArgs e)  
    {  
    }  
} }
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)
OUTPUT:**

localhost:50037/ValidationForm.aspx

Enter Name Name Required

Enter Password Password Required Enter Required

Confirm Password Enter Same Password

Enter Your Age Age Required Age should be between 21 to 30

Enter Your Email Id Email Id should should be proper

User Id User Id Required

localhost:50037/ValidationForm.aspx

Enter Name

Enter Password


Confirm Password

Enter Your Age

Enter Your Email Id

User Id UserId should write properly

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

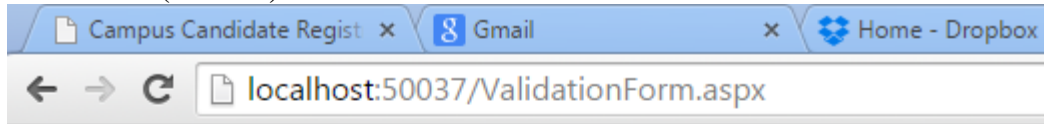

Enter Name

Enter Password

Confirm Password

Enter Your Age

Enter Your Email Id

User Id

PRACTICAL NO. : 05(2)

AIM: Programs using ASP.NET Server controls.

Create a website for a bank and include types of navigation.

DESIGN:



CODE:

Web.sitemap

```
<?xml version="1.0" encoding="utf-8" ?>
<siteMap xmlns="http://schemas.microsoft.com/AspNet/SiteMap-File-1.0" >
  <siteMapNode url="~\" title="Local bank of india" description="Online Banking">
    <siteMapNode url="default.aspx" title="Home" description="Go to the homepage" />
    <siteMapNode url="about.aspx" title="About Us" description="About us"/>
    <siteMapNode url="statistics.aspx" title="Statistics" description="Statistics">
      <siteMapNode url="data.aspx" title="Data Releases" description="Data Releases"/>
      <siteMapNode url="database.aspx" title="Database on Indian Economy"
description="Economy of India"/>
    <siteMapNode url="service.aspx" title="Service" description="Service Information"/>
  </siteMapNode>
  <siteMapNode url="publications.aspx" title="Publications" description="Publications">
    <siteMapNode url="annual.aspx" title="Annual" description="Annual"/>
    <siteMapNode url="monthly.aspx" title="Monthly" description="Monthly"/>
    <siteMapNode url="reports.aspx" title="Reports" description="Reports"/>
  </siteMapNode>
</siteMapNode>
</siteMap>
```


ASP.NET WITH C#
TYBSC-IT (SEM V)
OUTPUT: (sitemap)

main.aspx Web.sitemap reports.aspx X monthly.aspx annual.aspx publications.aspx ser
|div|
[Local bank of india](#) > [Publications](#) > Reports

main.aspx Web.sitemap reports.aspx monthly.aspx X annual.aspx publications.aspx service
|div|
[Local bank of india](#) > [Publications](#) > Monthly

main.aspx Web.sitemap reports.aspx monthly.aspx annual.aspx X publications.aspx service
|div|
[Local bank of india](#) > [Publications](#) > Annual

main.aspx Web.sitemap reports.aspx monthly.aspx annual.aspx publications.aspx X service.aspx data
|div|
[Local bank of india](#) > [Publications](#)

main.aspx Web.sitemap reports.aspx monthly.aspx annual.aspx publications.aspx service.aspx X dat
|div|
[Local bank of india](#) > [Statistics](#) > Service


main.aspx Web.sitemap reports.aspx monthly.aspx annual.aspx publications.aspx service.aspx database.aspx X data.
|div|
[Local bank of india](#) > [Statistics](#) > Database on Indian Economy

data.aspx X main.aspx Web.sitemap reports.aspx monthly.aspx a
|div|
[Local bank of india](#) > [Statistics](#) > Data Releases

statistics.aspx X data.aspx main.aspx Web.sitemap reports.aspx
|div|
[Local bank of india](#) > [Statistics](#)

about.aspx X statistics.aspx data.aspx main.aspx Web.sitemap reports.aspx monthly.aspx annual.aspx publications.aspx
|div|
[Local bank of india](#) > [About Us](#)

ASP.NET WITH C#
TYBSC-IT (SEM V)

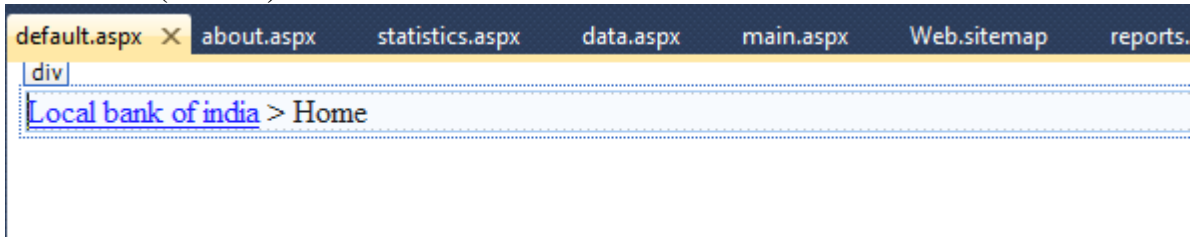

OUTPUT: (Website form Tree view Controls)



PRACTICAL NO. : 06(1)


AIM: Database programs with ASP.NET and ADO.NET.

Create a Web App to display all the Empname and Deptid of the employee from the database using SQL source control and bind it to GridView . Database fields are(DeptId, DeptName, EmpName, Salary).

Steps:

1. File→new→website→empty website→name it→ok
2. Right click on website made→add new item→sql server database→name it→add→yes
3. Right click on table In server explorer→add new table→add columns→save the table
4. Right click on table made →show table data→add values
5. Right click on website→add new item→webform→name it
6. Go to design view
7. Add a gridview→below that add sqldatasource
8. Configure sqldatasource→then add it to the gridview
9. Go to gridview menu enable sorting

DESIGN:

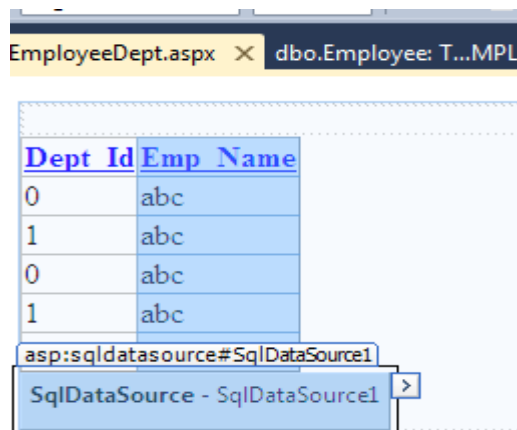

The screenshot shows the structure of the 'Employee' table in a SQL Server database. The table has the following columns:

Column Name	Data Type	Allow Nulls
Dept_Id	tinyint	<input type="checkbox"/>
Dept_Name	varchar(30)	<input type="checkbox"/>
Emp_Name	varchar(30)	<input type="checkbox"/>
Salary	numeric(12, 2)	<input type="checkbox"/>

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

	DeptId	DeptName	EmpName	Salary
	101	BscIT	Prachit	1200.00
	102	BMS	Roman	1200.00
	103	MScIT	Brock	1400.00
	104	BCom	Seth	1100.00
	101	BScIT	Dean	1300.00
*	NULL	NULL	NULL	NULL

OUTPUT:

<u>Deptid</u>	<u>Empname</u>
1	swati
2	natasha
3	thor
4	max
5	mahi

PRACTICAL NO. : 06(2)

AIM: Database programs with ASP.NET and ADO.NET

Create a Login Module which adds Username and Password in the database. Username in the database should be a primary key.

Steps2:

1. File→new→website→empty website→name it→ok
2. Right click on website made→add new item→sql server database→name it→add→yes
3. Right click on table In server explorer→add new table→add columns→save the table
4. Right click on table made →show table data→add values
5. Right click on website→add new item→webform→name it
6. Go to design view→add form for login
7. Add sqldatasource→configure it
8. Write code

DESIGN:

The screenshot displays the design view of a web form for a login module. The form includes two text input fields for 'UserName' and 'Password', a 'SignUp' button, and a 'SqlDataSource - SqlDataSource1' control. Below the design view, a data table is shown with columns 'UserName' and 'Password'. The first row contains 'Prachit' and '12345', and the second row contains 'NULL' and 'NULL'.

	UserName	Password
▶	Prachit	12345
*	NULL	NULL

CODE:



LoginModule.aspx

```
using System;  
using System.Collections.Generic;  
using System.Linq;  
  
using System.Web;
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
using System.Web.UI;
using System.Web.UI.WebControls;
public partial class LoginModule : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
    }
    protected void btnSignUp_Click(object sender, EventArgs e)
    {
        SqlDataSource1.InsertParameters["Username"].DefaultValue = txtUserName.Text;
        SqlDataSource1.InsertParameters["Password"].DefaultValue = txtPassword.Text;
        SqlDataSource1.Insert();
        lblResult.Text = "User Added";
    }
}
```

OUTPUT:

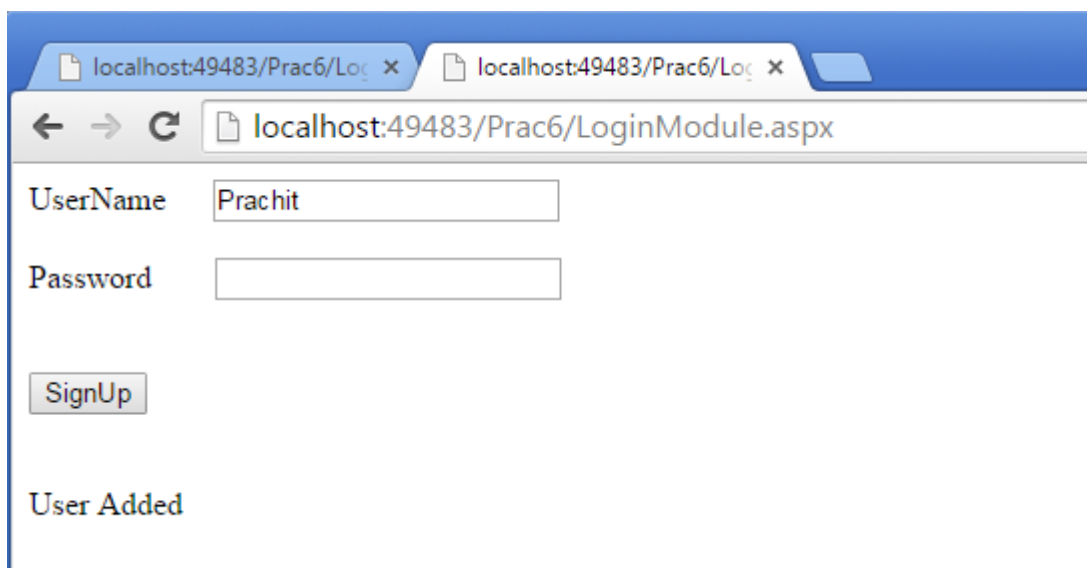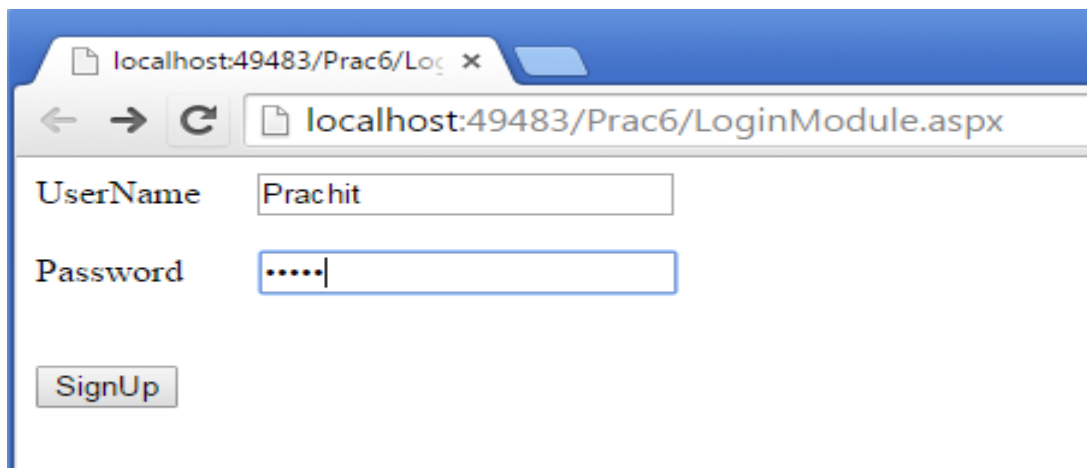

PRACTICAL NO. : 06(3)

AIM: Database programs with ASP.NET and ADO.NET

Create a web application to insert 3 records inside the SQL database table having following fields(DeptId, DeptName, EmpName, Salary). Update the salary for any one employee and increment it to 15% of the present salary. Perform delete operation on 1 row of the database table.

Steps:

9. File→new→website→empty website→name it→ok
10. Right click on website made→add new item→sql server database→name it→add→yes
11. Right click on table In server explorer→add new table→add columns→save the table
12. Right click on table made →show table data→add values
13. Right click on website→add new item→webform→name it
14. Go to design view→add necessary form
15. Add a grid view below the form→below that add sqldatasource
16. Configure sqldatasource→then add it to the gridview
17. Go to grid view menu→add columns→select command field→check on delete and edit→ok
- 10.Double click on button→write code.

DESIGN:

The screenshot shows the design view of an ASP.NET web application. At the top, there are tabs for 'EmployeeDept.aspx', 'EmployeeDept.aspx.cs', 'LoginModule.aspx.cs', and 'LoginModule.aspx.cs'. Below the tabs, there is a table with the following data:

Dept Id	Dept Name	Emp Name	Salary	
0	abc	abc	0	Edit Delete
1	abc	abc	0.1	Edit Delete
0	abc	abc	0.2	Edit Delete
1	abc	abc	0.3	Edit Delete
0	abc	abc	0.4	Edit Delete

Below the table, there are four input fields labeled 'Dept ID', 'Dept Name', 'Emp Name', and 'Salary'. Below these fields is an 'add' button. At the bottom, there is a label 'asp:label#lblresult' and a text box containing '[lblresult]'.


CODE:

ASP.NET WITH C# TYBSC-IT (SEM V)

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class LoginModule : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
    }
    protected void btnSignUp_Click(object sender, EventArgs e)
    {
        SqlDataSource1.InsertParameters["Username"].DefaultValue = txtUserName.Text;
        SqlDataSource1.InsertParameters["Password"].DefaultValue = txtPassword.Text;
        SqlDataSource1.Insert();
        Textbox1.Text="";
        Textbox2.Text="";
    }
}
```

OUTPUT:



<u>Dept_Id</u>	<u>Dept_Name</u>	<u>Emp_Name</u>	<u>Salary</u>	
101	BScIT	Swati	10000.00	Edit Delete
102	BMS	Shirin	20000.00	Edit Delete
103	BBI	Esha	30000.00	Edit Delete
104	MScIt	Tanu	10000.00	Edit Delete
105	BAF	Shahrukh	25000.00	Edit Delete
106	BScIT	Ketki	30000.00	Edit Delete
107	MScIT	Darshana	35000.00	Edit Delete

Dept ID


Dept Name

Emp Name

Salary

User Added

ASP.NET WITH C#
TYBSC-IT (SEM V)

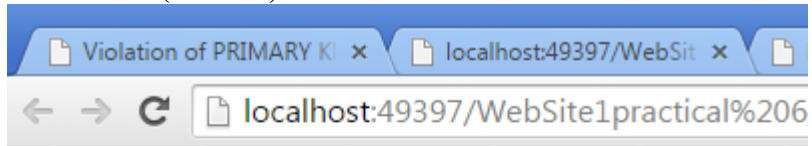

<u>Dept_Id</u>	<u>Emp_Name</u>	command
101	Swati	Edit Delete
102	Shirin	Edit Delete
103	Esha	Edit Delete
104	Shiwani	Edit Delete
105	Shahrukh	Edit Delete
106	Ketki	Edit Delete

PRACTICAL NO. : 07(1)

AIM: Programs using Language Integrated query.

Create the table with the given fields.


FIELD NAME	DATA TYPE
EmpNo	number
EmpName	varchar
EmpSal	number
EmpJob	varchar
EmpDeptNo	number

For the given table design a web page to display the employee information from table to grid control. Use LINQ TO ADO.NET.

STEPS:


1. File→new→Website→Empty Website→name it→Add
2. Right click on website on solution explorer→Add new item→Sql server database→name it→add→yes
3. Server Explorer→table→right click→add new table→enter the columns→save the table
4. Server explorer→right click on table which is made→show table data→add values
5. Server explorer→right click on website created→add new item→web form→name it
6. Go to design view of aspx page→add grid view from toolbox.
Double click on aspx page.

DESIGN:

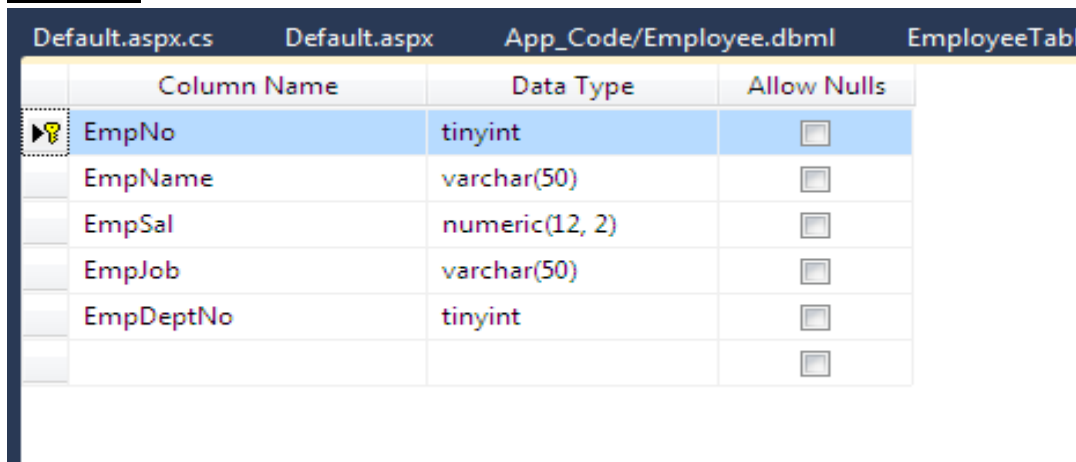



Column Name	Data Type	Allow Nulls
EmpNo	tinyint	<input type="checkbox"/>
EmpName	varchar(50)	<input type="checkbox"/>
EmpSal	numeric(12, 2)	<input type="checkbox"/>
EmpJob	varchar(50)	<input type="checkbox"/>
EmpDeptNo	tinyint	<input type="checkbox"/>

ASP.NET WITH C# TYBSC-IT (SEM V)

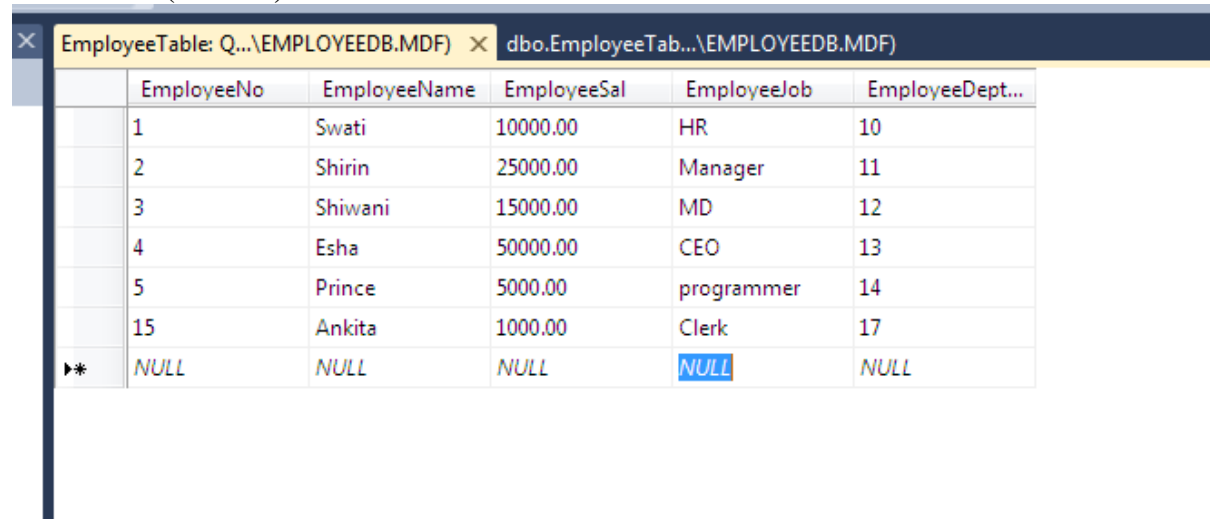

The screenshot shows a SQL Server Enterprise Manager window with a query result grid for the EmployeeTable. The grid has six columns: EmployeeNo, EmployeeName, EmployeeSal, EmployeeJob, and EmployeeDept... The data rows are as follows:

EmployeeNo	EmployeeName	EmployeeSal	EmployeeJob	EmployeeDept...
1	Swati	10000.00	HR	10
2	Shirin	25000.00	Manager	11
3	Shiwani	15000.00	MD	12
4	Esha	50000.00	CEO	13
5	Prince	5000.00	programmer	14
15	Ankita	1000.00	Clerk	17
▶*	NULL	NULL	NULL	NULL

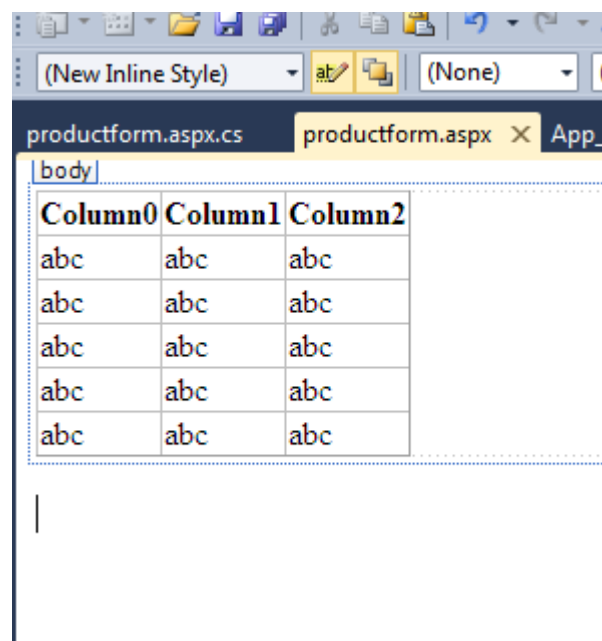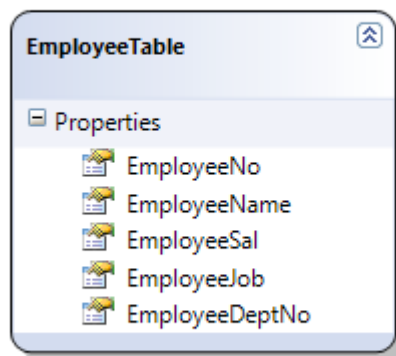


CODE:

ASP.NET WITH C#
TYBSC-IT (SEM V)
Default.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Data.Linq;
using System.Data.SqlClient;
using System.Web.UI.WebControls;
public partial class _Default : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        EmployeeDataContext dc = new EmployeeDataContext();
        var query = from m in dc.EmployeeTables select m;

        GridView1.DataSource = query;
        GridView1.DataBind();
    }
}
```

OUTPUT:

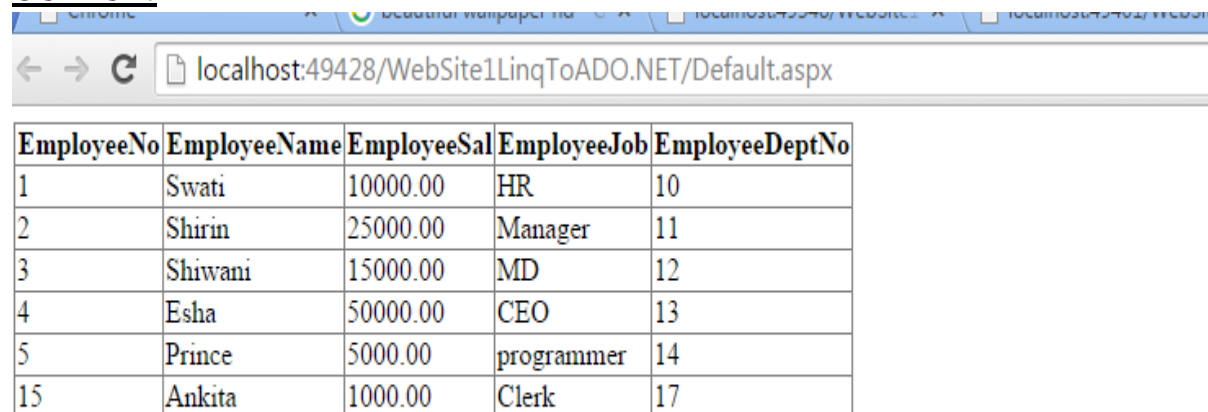

The screenshot shows a web browser window with the address bar displaying 'localhost:49428/WebSite1LinqToADO.NET/Default.aspx'. Below the browser window, a table is displayed with the following data:

Employee.No	EmployeeName	EmployeeSal	EmployeeJob	EmployeeDeptNo
1	Swati	10000.00	HR	10
2	Shirin	25000.00	Manager	11
3	Shiwani	15000.00	MD	12
4	Esha	50000.00	CEO	13
5	Prince	5000.00	programmer	14
15	Ankita	1000.00	Clerk	17

PRACTICAL NO. : 07(2)

AIM: Programs using Language Integrated query.

Create the table with the given fields.


FIELD NAME	DATA TYPE
SRollno	int
SName	string
SAddress	string
SFees	int

For the given table design a web page to display the employee information from table to grid control. Use LINQ TO XML.

STEPS:

1. File→New→website→Empty Website→name it
2. Solution Explorer→right click on website made→add new item→XML file→name it→add→write code
3. Solution explorer→right click on website→add new item→webform→name it→add
4. Go to design view→double click page→write code.

DESIGN:

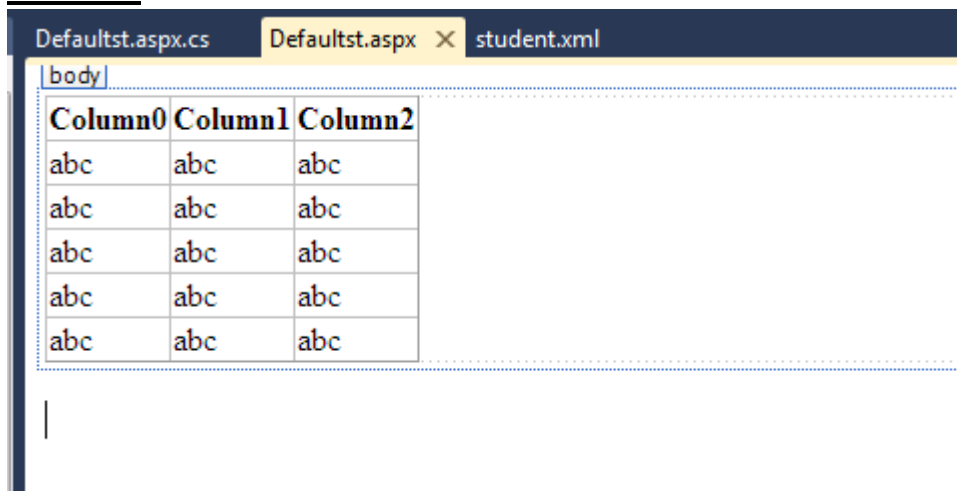

CODE:

student.xml

```
<?xml version="1.0" encoding="utf-8" ?>
<TYStudents>
  <student>
    <scrollno>1</scrollno>
    <sname>swati</sname>
    <saddress>Wadala</saddress>
    <sfees>1000</sfees>
  </student>
  <student>
    <scrollno>2</scrollno>
    <sname>natasha</sname>
```


**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
<saddress>Dadar</saddress>
<sfees>3000</sfees>
</student>
</TYStudents>
```

Defaultst.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Xml.Linq;
using System.Web.UI.WebControls;
public partial class Defaultst : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        XmlDocument xmlDoc =
        XmlDocument.Load(HttpContext.Current.Server.MapPath("student.xml"));
        var studs = from s in xmlDoc.Descendants("student")
                    select s;
        GridView1.DataSource = studs;
        GridView1.DataBind();
    }
}
```

OUTPUT:

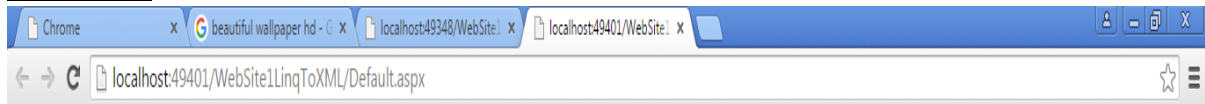

Value	Xml	HasAttributes	HasElements	IsEmpty	Value	BaseUri
1SwatiKoparkhairane10002SanjeelaNavi Mumbai2000	<student><student><scrollno>1</scrollno><sname>Swati</sname><saddress>Koparkhairane</saddress><sfees>1000</sfees></student><student><scrollno>2</scrollno><sname>Sanjeela</sname><saddress>Navi Mumbai</saddress><sfees>2000</sfees></student></student>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	1SwatiKoparkhairane10002SanjeelaNavi Mumbai2000	
1SwatiKoparkhairane1000	<student><scrollno>1</scrollno><sname>Swati</sname><saddress>Koparkhairane</saddress><sfees>1000</sfees></student>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	1SwatiKoparkhairane1000	
2SanjeelaNavi Mumbai2000	<student><scrollno>2</scrollno><sname>Sanjeela</sname><saddress>Navi Mumbai</saddress><sfees>2000</sfees></student>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	2SanjeelaNavi Mumbai2000	

PRACTICAL NO. : 07(3)

AIM: Programs using Language Integrated query.

Create the table with the given fields .


FIELD NAME	DATA TYPE
PID	string
PName	string
PPrice	int
PWeight	int

For the given table design a web page to display the employee information from table to grid control. Use LINQ TO Objects.

STEPS:

1. File → new → website → name it
2. Solution explorer → right click on website made → class → name it → yes → write code
3. Solution explorer → right click on website → add new item → webform → name it → add
4. Go to design view → add GridView → Double click on page → write code.

DESIGN:

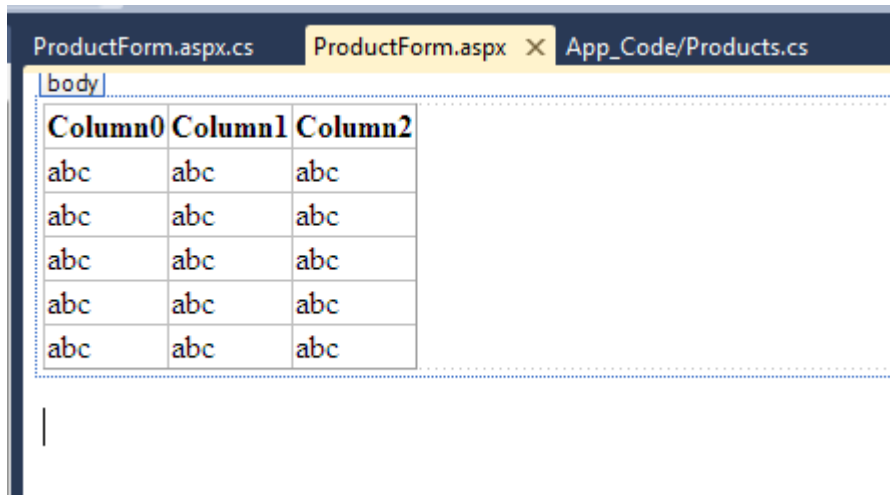

CODE:

App_Code/Products.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
public class Products
{
public string PID { get; set; }
public string PName { get; set; }
public int PPrice { get; set; }
public int PWeight { get; set; }
```


**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
public Products()  
{  
}  
}
```

ProductForm.aspx.cs

```
using System;  
using System.Collections.Generic;  
using System.Linq;  
using System.Web;  
using System.Web.UI;  
using System.Web.UI.WebControls;  
public partial class ProductForm : System.Web.UI.Page  
{  
    public List<Products> GetProdData()  
    {  
        return new List<Products> {  
            new Products { PID="P101", PName="Laptop", PPrice=25000 , PWeight=1500},  
            new Products { PID="P102", PName="Desktop", PPrice=22000 , PWeight=8000},  
            new Products { PID="P103", PName="Mouse", PPrice=500 , PWeight=250}  
        };  
    }  
    protected void Page_Load(object sender, EventArgs e)  
    {  
        var prod = GetProdData();  
        var query = from f in prod  
                    orderby f.PName  
                    select f;  
        this.GridView1.DataSource = query;  
        this.GridView1.DataBind();  
    }  
}
```

OUTPUT:

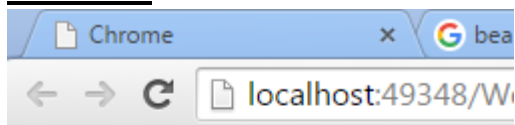

PID	PName	PPrice	PWeight
P102	Desktop	15000	1000
P101	Laptop	25000	1500
P103	Mouse	25000	1500

PRACTICAL NO. : 08

AIM: (A) For the web page created for the display OF Employee data change the authentication mode to Windows

CODE:

```
<system.web>  
<authentication mode="Windows">  
<forms loginUrl="~/Prac8/EmployeeForm.aspx">  
</authentication>  
</system.web
```

Steps for changing the authentication mode

1. Open the website created for displaying the Employee data
2. From the solution Explorer window open the web.config file
3. In the web.config file search the <system.web> xml tag and in <system.web> xml tag go to authentication tag
4. Change the authentication mode to windows as given above.

AIM: (B) For the webpage created for the display of Student data change the authorization mode so that only users who have logged in as VSIT will have the authority to aces the page

CODE:

```
<system.web>  
<authentication>  
<allow users="VSIT"/>  
<deny users="*" />  
</authentication>  
</system.web>
```




Steps for changing the authorization

1. Open the website created for displaying the Student data
2. From the solution Explorer window open the web.config file
3. In the Web.config file search the <system.web> xml tag and in <system.web> xml tag go to authentication tag
4. Change the coding in the tag as given above

PRACTICAL NO: 9(A)

AIM: Create a web page to display the news from the news table(id, news_dtl). Use AJAX.

DESIGN :

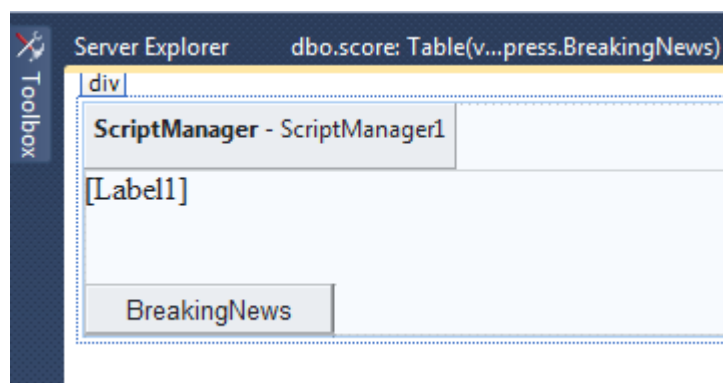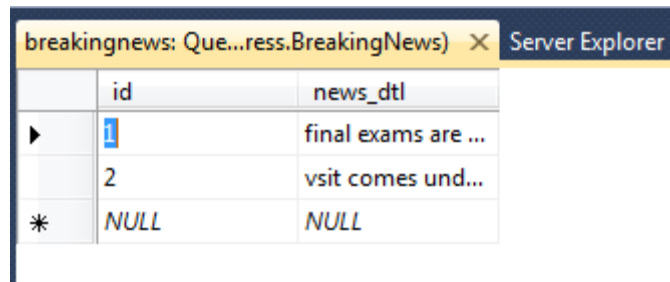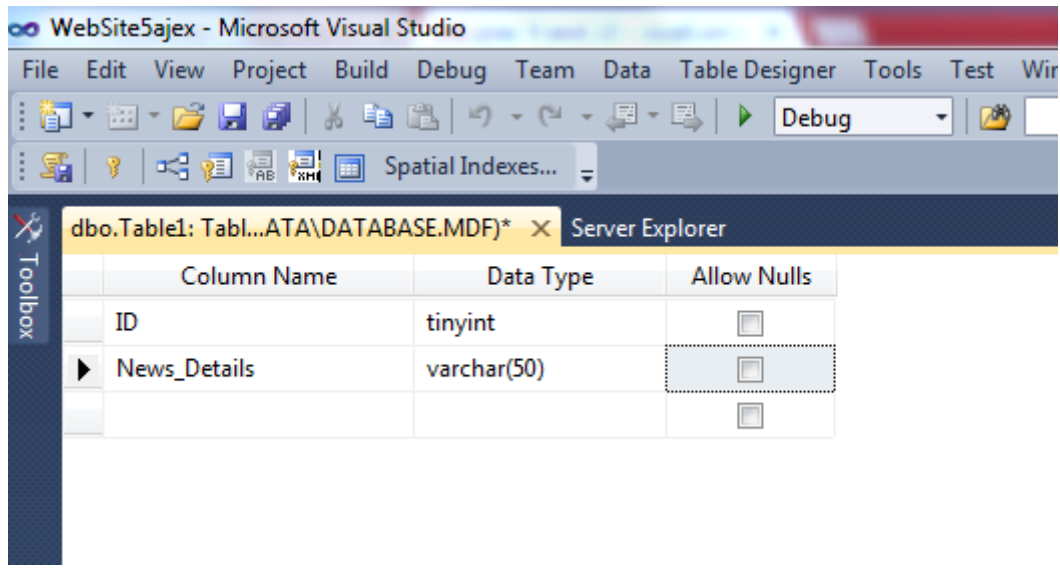

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

CODE:


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;

public partial class ajaxform : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }

    protected void Button1_Click(object sender, EventArgs e)
    {
        SqlConnection con = new SqlConnection(@"Data Source=. \sqlexpress;Initial
        Catalog=BreakingNews;Integrated Security=True");
        con.Open();
        SqlCommand com = new SqlCommand("select * from news", con);
        SqlDataReader dr = com.ExecuteReader();
        while (dr.Read())
        {
            Label1.Text += dr[1].ToString() + "<br>";
        }
        con.Close();
    }
}
```


OUTPUT:

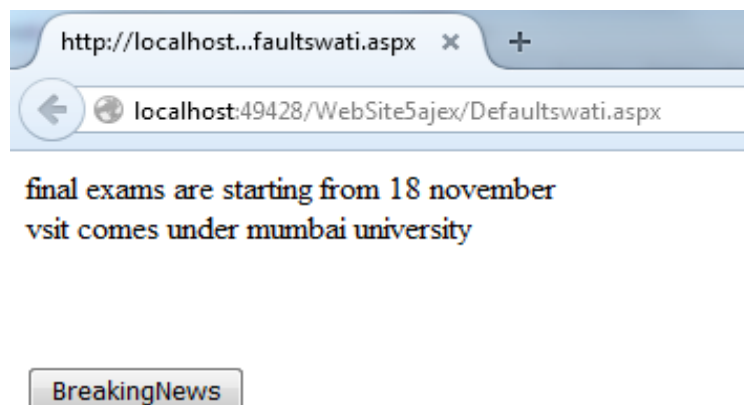

PRACTICAL NO: 9(B)

AIM: In the above website also display the feedback on the browser as “work is in progress”.

DESIGN:

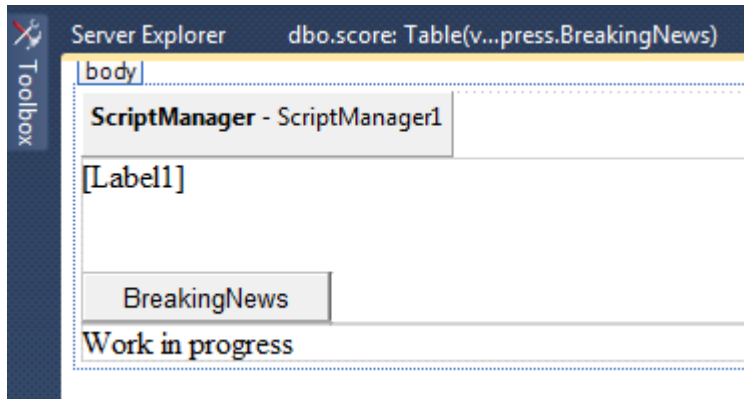

CODE:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;

public partial class ajaxform : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        System.Threading.Thread.Sleep(5000);
    }
    protected void Button1_Click(object sender, EventArgs e)
    {
        SqlConnection con = new SqlConnection(@"Data Source=.\\sqlexpress;Initial
        Catalog=BreakingNews;Integrated Security=True");
        con.Open();
        SqlCommand com = new SqlCommand("select * from news", con);
        SqlDataReader dr = com.ExecuteReader();
        while (dr.Read())
        {
            Label1.Text += dr[1].ToString() + "<br>";
        }
        con.Close();
    }
}
```

Source Code:

```
<%@PageLanguage="C#" AutoEventWireup="true" CodeFile="ajaxform.aspx.cs" Inherits="aj  
axform"%>
```

```
<!DOCTYPEhtmlPUBLIC "-//W3C//DTD XHTML 1.0  
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title></title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<div>
```

```
<asp:ScriptManagerID="ScriptManager1"runat="server">
```

```
</asp:ScriptManager>
```

```
<br/>
```

```
<asp:UpdatePanelID="UpdatePanel1"runat="server">
```

```
<ContentTemplate>
```

```
<asp:LabelID="Label1"runat="server"></asp:Label>
```

```
<br/>
```

```
<br/>
```

```
<asp:ButtonID="Button1"runat="server"Text="Breaking news"/>
```

```
<br/>
```

```
</ContentTemplate>
```

```
</asp:UpdatePanel>
```

```
<br/>
```

```
<br/>
```

```
<br/>
```

```
<asp:UpdateProgressID="UpdateProgress1"runat="server">
```

```
<ProgressTemplate>Work in progress</ProgressTemplate>
```

```
</asp:UpdateProgress>
```

```
<br/>
```

```
<br/>
```


```
</div>
```

```
</form>
```

```
</body>
```

```
</html>
```

Output:

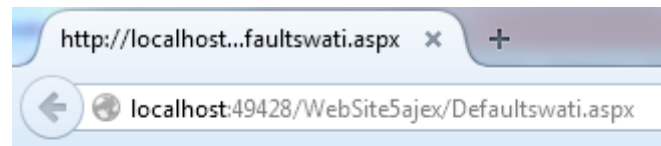

BreakingNews
Work in progress




final exams are starting from 18 november
vsit comes under mumbai university

BreakingNews

PRACTICAL NO: 9(C)


AIM: Create a web page to display the cricket score from the table event(id, name, score).
Refresh the website automatically after every 30 seconds.

DESIGN:

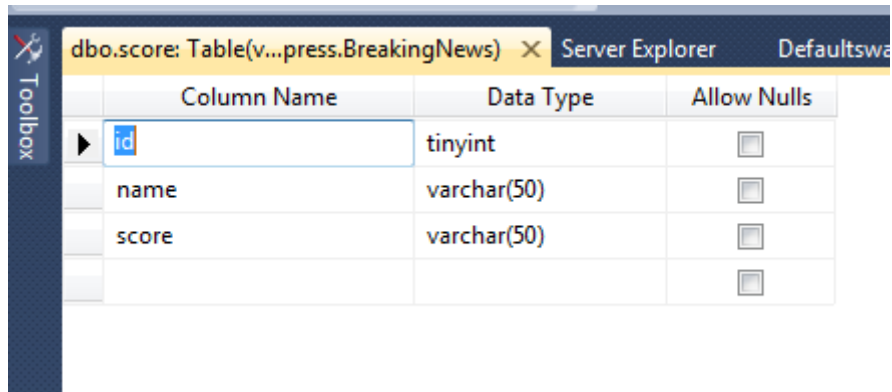


The screenshot shows the 'Server Explorer' window in SQL Server Enterprise Manager. It displays the schema for the 'dbo.score' table. The table has three columns: 'id' (tinyint), 'name' (varchar(50)), and 'score' (varchar(50)). All columns allow nulls.

Column Name	Data Type	Allow Nulls
id	tinyint	<input type="checkbox"/>
name	varchar(50)	<input type="checkbox"/>
score	varchar(50)	<input type="checkbox"/>

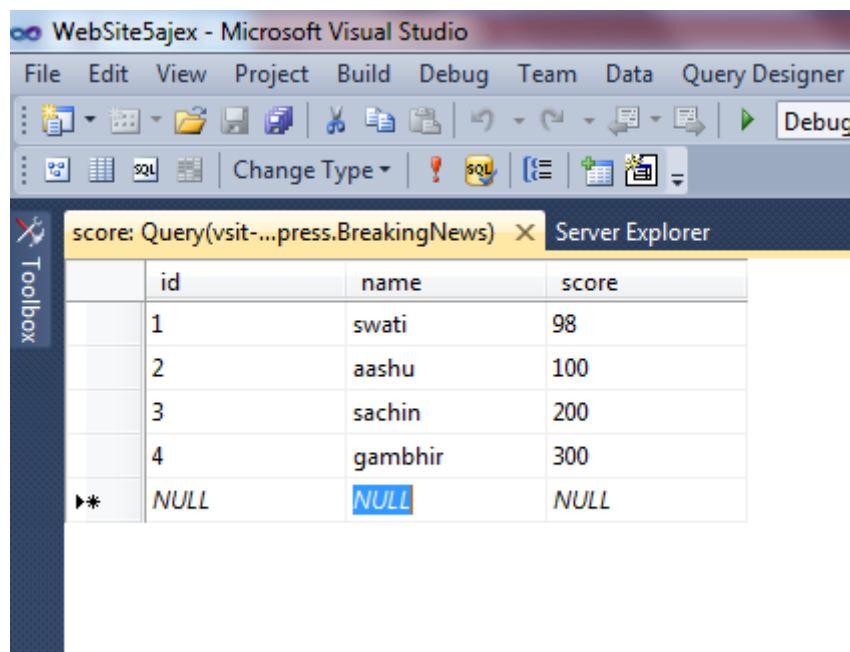

The screenshot shows the 'Server Explorer' window in Microsoft Visual Studio. It displays the data in the 'score' table. The table has four rows of data, including a NULL row.

id	name	score
1	swati	98
2	aashu	100
3	sachin	200
4	gambhir	300
NULL	NULL	NULL

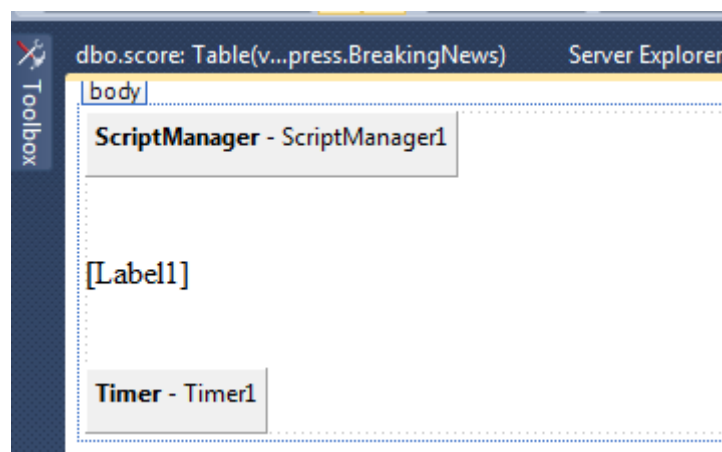

The screenshot shows the 'Design' view of a web page in Visual Studio. The page contains a 'ScriptManager' control, a 'Label1' control, and a 'Timer' control.

Control Name
ScriptManager - ScriptManager1
[Label1]
Timer - Timer1

CODE:

Default.aspx


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
public partial class Defaultswati1 : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }
    protected void Timer1_Tick(object sender, EventArgs e)
    {
        SqlConnection conn = new SqlConnection(@"Data Source=.sqlexpress;Initial
Catalog=BreakingNews;Integrated Security=True");
        SqlDataReader dr = null;

        conn.Open();
        SqlCommand cmd = new SqlCommand("Select * from score", conn);
        dr = cmd.ExecuteReader();

        while (dr.Read())
        {
            Label1.Text += dr[0].ToString() + " " + dr[1].ToString() + " " + dr[2].ToString() +
"<br>";
        }
        conn.Close();
    }
}
```


**ASP.NET WITH C#
TYBSC-IT (SEM V)
OUTPUT:**

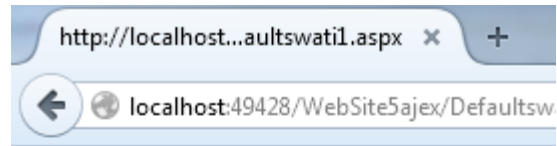


1 swati 98
2 aashu 100
3 sachin 200
4 gambhir 300
1 swati 98
2 aashu 100
3 sachin 200
4 gambhir 300
1 swati 98
2 aashu 100
3 sachin 200
4 gambhir 300

PRACTICAL NO: 10(A)

AIM: Create a web page to give different color effects for paragraph tags, heading tags and complete web page using JQuery.

DESIGN:

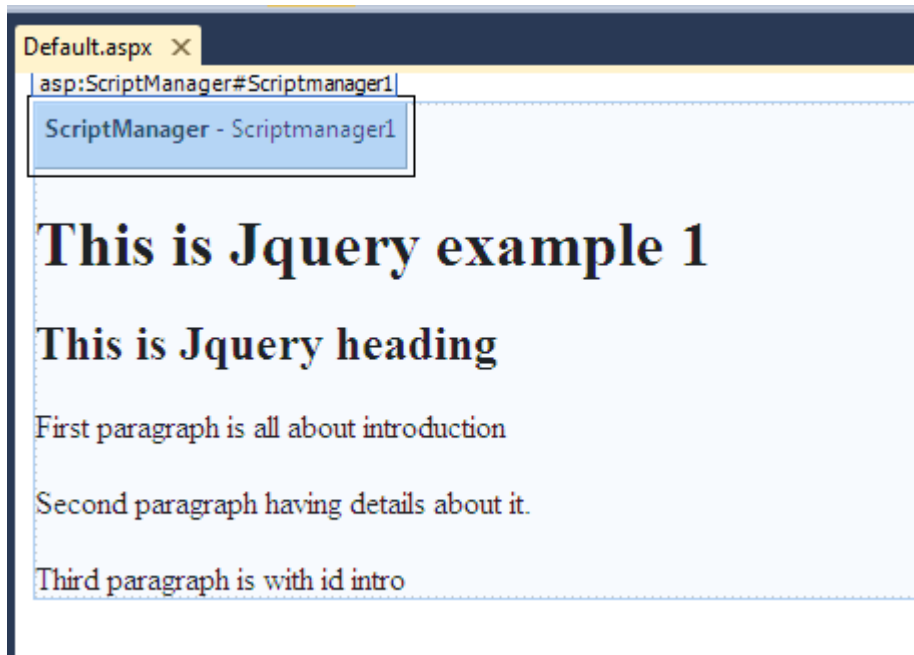

Source Code:

```
<%@PageLanguage="C#" AutoEventWireup="true" CodeFile="Default.aspx.cs" Inherits="_Default"%>
```


```
<!DOCTYPEhtmlPUBLIC "-//W3C//DTD XHTML 1.0  
Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">  
<headrunat="server">  
<title></title>  
</head>  
<body>  
<formid="form1" runat="server">  
<div>  
<scripttype="text/javascript">  
    $(document).ready(function () {  
        $("p").css("color", "Yellow");  
        $("h1,h2").css("color", "White");  
        $("p#intro").css("color", "Blue");  
        $("*").css("background-color", "Red");  
    });
```

ASP.NET WITH C# TYBSC-IT (SEM V)

```
</script>  
<asp:ScriptManagerID="Scrpitmanager1"runat="server">  
<Scripts>  
<asp:ScriptReferencePath="~/scrpits/jquery-1.11.3.js"/>  
  
</Scripts>  
</asp:ScriptManager>  
<h1>This is JQuery example</h1>  
<h2>This is JQuery heading</h2>  
<p>First paragraph is all about introduction</p>  
<p>Second paragraph having details about it</p>  
<pid="intro">Third paragraph is with id intro</p>  
</div>  
</form>  
</body>  
</html>
```

OUTPUT:

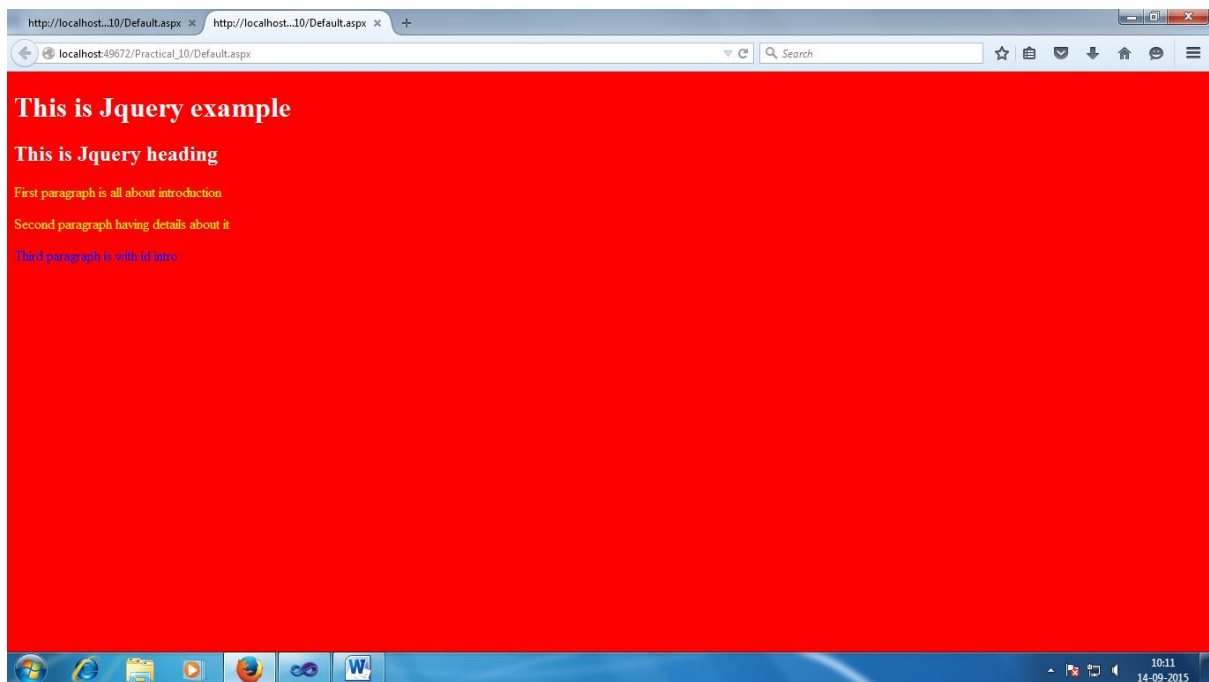

PRACTICAL NO: 10(B)

AIM: Create a web page to display animation using JQuery.

DESIGN:



Source Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Default2.aspx.cs"
Inherits="Default2" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title></title>
</head>
<body>
  <form id="form1" runat="server">
    <div>
      <script type="text/javascript">
        $(document).ready(function () {
          $('p').hide(1000);
          $('p').show(2000);
          $('p').toggle(3000);
          $('p').slideDown(4000);
          $('p').slideUp(5000);

          $('h1').animate({
            opacity: 0.4, marginLeft: '50px', fontSize: '100px'
          }, 8000);
        });
      </script>
    </div>
  </form>
</body>
</html>
```

**ASP.NET WITH C#
TYBSC-IT (SEM V)**

```
</script>  
<asp:ScriptManager ID="Scriptmanager1" runat="server">  
<Scripts>  
<asp:ScriptReference Path="~/Scripts/jquery-1.11.3.js" />  
</Scripts>  
</asp:ScriptManager>  
<p>First Paragraph</p>  
<h1>First Heading</h1>  
  
</div>  
</form>  
</body>  
</html>
```

OUTPUT:



PRACTICAL NO: 10(C)

AIM: Create a web page to display hide, show, slidedown, slideup and Toggle effects for paragraph tags, using JQuery.

DESIGN:



Source Code:

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Default2.aspx.cs"
Inherits="Default2" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title></title>
</head>
<body>
  <form id="form1" runat="server">
    <div>
      <script type="text/javascript">
$(document).ready(function(){
$(h1').animate({
opacity: 0.4,marginLeft:'50px',fontSize:'100px'},8000);
});
</script>
      <asp:ScriptManager ID="ScriptManager1" runat="server">
        <Scripts>
          <asp:ScriptReference Path="~/script/jquery-1.11.3.js" /></Scripts></asp:ScriptManager>
        <p>First paragraph</p>
        <h1>First heading heading</h1>
```

ASP.NET WITH C#
TYBSC-IT (SEM V)


</div>

</form>

</body>

</html>

OUTPUT:



First paraamrnh

First heading heading